

# Campbell®

## Campbell® Chain

Founded in 1919, Campbell is the largest manufacturer of welded and weldless chain in the United States. Users of Campbell chain can select from a wide range of working load capacities including proof coil, high test, transport and alloy; finishes including self-colored, Blu-Krome®, galvanized and bright color polycoated; links that are short, long, twisted, locked, looped, even stamped from flat stock. Several chain types are even available in solid brass and bronze. Campbell chains and assemblies, including slings for overhead lifting, and binder chains, have earned for the manufacturer an outstanding reputation for quality.



The Campbell operation facilities in York, PA, and Cortland, NY, conform to Quality Standard ISO 9001.

Contents
Accessories, plastic
Cable
Camtrol comparison system
Chain, aluminum
Chain, animal
Chain, ball
Chain, BBB
Chain, binder
Chain, cam-alloy
Chain, cathedral
Chain, clock
Chain, coil
Chain, construction
Chain, decorator
Chain, dock fender
Chain, fishing
Chain, high test
Chain, hobby/craft
Chain, jack
Chain, log
Chain, loop
Chain, machine
Chain, marine
Chain, mooring
Chain, oval link
Chain, passing link
Chain, plastic
Chain, proof coil
Chain, safety
Chain, sash
Chain, stainless steel
Chain, tow
Chain, transport

Contents
Chain, tuna
Chain, twist
Chain, utility
Chain, well
Chain, winch line
Cutters, chain and cable
Leads, anchor
Sizing chart



# Camtrol System

Campbell's CAMTROL SYSTEM makes chain products easier to identify and understand. That's because all are based on engineering formulas computed according to ISO (International Organization for Standardization), NACM (National Association of Chain Manufacturers) and ASTM (American Society for Testing and Materials). Use the CAMTROL SYSTEM to make wise chain purchasing decisions. Use it to compare the various categories of chain, to choose the right chain for the job according to the price per thousand pounds of working load instead of buying on a price per foot.

Consult your Campbell Chain distributor for current prices. Then refer to the chart below and divide the price per foot by the working load limit (in thousands of pounds) shown in the table.

By using this comparison system you will discover that you can buy a smaller, easier to handle chain, and at less cost based on its working load limit.

**Variations in finish or heat treatment**

The mechanical properties shown on the Camtrol Chart apply only to the various chains in their standard finish and heat treated condition. Finishes such as galvanizing or electroplating may reduce strengths. The manufacturer's revised recommendations should be solicited when such treatments are desirable for specific applications.

**Hallmarking (Identification)**

All System 4, 7, 8, and 10 chains and all System 3 chains 5/16" (8 mm) and larger are marked with the grade identifier approximately every 12" or less. Please refer to the chain type of interest in this catalog for the specific hallmarks.

Grade	Camtrol System Number	Nominal Dimensions								Weight Per 100 Feet		Working Load Limit	
		Trade Size		Diameter		Inside Length		Inside Width		lb	kg	lb	kg
		in.	mm	in.	mm	in.	mm	in.	mm				
30	3	1/8	4	.156	4.0	.89	22.61	.29	7.33	22	10	400	180
30	3	3/16	5.5	.205	5.5	.95	24.13	.34	8.63	35	16	800	365
30	3	1/4	7	.260	7.0	1.20	30.50	.45	11.40	56	25	1,300	580
30	3	5/16	8	.312	8.0	1.27	32.27	.47	11.93	83	38	1,900	860
30	3	3/8	10	.369	10.0	1.36	34.46	.57	14.47	125	57	2,650	1,200
30	3	1/2	13	.512	13.0	1.70	43.18	.75	19.00	237	108	4,500	2,030
30	3	5/8	16	.656	16.7	2.10	53.34	.87	22.09	390	177	6,900	3,130
30	3	3/4	20	.781	19.8	2.70	68.58	1.02	26.00	535	243	10,600	4,810
30	3	7/8	22	.906	23.0	2.34	59.44	1.37	34.80	770	349	12,800	5,810
43	4	1/4	7	.276	7.0	1.20	30.50	.45	11.40	63	28	2,600	1,180
43	4	5/16	8	.343	8.7	1.27	32.27	.47	11.94	102	46	3,900	1,770
43	4	3/8	10	.394	10.0	1.15	29.21	.58	14.73	160	73	5,400	2,450
43	4	7/16	11.9	.468	11.9	1.29	32.77	.67	17.02	216	98	7,200	3,270
43	4	1/2	13	.531	13.0	1.70	43.18	.75	19.00	260	118	9,200	4,170
43	4	5/8	16	.656	16.7	1.94	49.27	.93	23.62	356	161	11,500	5,220
43	4	3/4	20	.781	23.0	2.21	56.13	1.10	27.94	535	243	16,200	7,350
70	7	1/4	7	.312	7.9	.94	23.88	.46	11.68	91	41	3,150	1,430
70	7	5/16	8.7	.343	8.7	1.01	25.65	.48	11.68	111	50	4,700	2,130
70	7	3/8	10	.406	10	1.36	34.46	.57	14.47	150	68	6,600	2,990
70	7	7/16	11.9	.468	11.9	1.29	32.77	.67	17.02	212	96	8,750	3,970
70	7	1/2	13	.531	13.0	1.70	43.18	.75	19.00	260	118	11,300	5,130
70	7	5/8	16	.630	16.0	1.93	49.02	.87	22.10	375	170	15,800	7,170
80	8	7/32	5.5	.218	5.5	.69	17.53	.30	7.62	43	20	2,100	970
80	8	5/16	8	.315	8.0	.94	23.88	.46	11.68	92	42	4,500	2,000
80	8	1	26	1.000	25.4	2.80	71.12	1.40	35.56	965	438	47,700	21,600
80	8	1 1/4	32	1.250	31.8	3.50	88.90	1.75	44.45	1525	692	72,300	32,800
63	6	1 1/2	38	1.500	38.1	4.49	114.04	1.94	49.27	2140	971	80,000	36,400
100	10	9/32	7	.285	7.2	.86	21.80	.41	11.40	74	34	4,300	1,950
100	10	3/8	10	.402	10.2	1.22	31.00	.55	14.00	148	67	8,800	3,990
100	10	1/2	13	.522	13.2	1.54	39.90	.45	19.10	250	113	15,000	6,800
100	10	5/8	16	.643	16.3	1.93	49.00	.87	22.10	379	172	22,600	10,250
100	10	3/4	20	.802	20.4	2.42	61.50	1.09	27.70	598	271	35,300	16,000
100	10	7/8	22	.882	22.4	2.70	68.52	1.28	32.48	775	351	42,700	19,400

**⚠️ ADVERTENCIA**

Para prevenir la posibilidad de una lesión personal seria:

- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** para cargar hacia arriba o para izar.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.

**⚠️ WARNING**

To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** for overhead lifting or hoisting.
- **DO NOT USE** if the chain or components are visibly distorted or worn.

## Important Chain Terms

### WORKING LOAD LIMIT

The "working load limit" (rated capacity) is the maximum combined static and dynamic load in pounds or kilograms which should ever be applied to the product in service, even when the product is new, and when the load is uniformly applied in direct tension to the product.

### PROOF TEST

The "proof test" is a quality control test applied to chain for the purpose of verifying weld and material quality. It is the minimum force in pounds or newtons that the chain has withstood in direct tension as part of the manufacturing process. Proof testing assures that the chain is more than capable of performing at its rated working load limit. Proof test loads are a manufacturing integrity test and shall not be used as criteria for service or design purposes. All Campbell proof tested chain and components are proof tested in accordance with the applicable ASTM, NACM and AISI/ASME requirements.

## Warnings, Cautions, Inspection and Proper Use of Chain

Campbell chain products and components are designed and built for rugged lasting service. As with any quality product certain precautions and standards of treatment should be observed. Proper care will extend the useful life of the product.

### INSTRUCTIONS REGARDING COMPONENTS AND FITTINGS

Components, such as hooks or shackles, should have at least the same working load limit (rated capacity) as the chain with which they are used. If not, the assembly shall be rated to the capacity of the weakest component. Campbell offers a full line of components engineered specifically to be compatible with our chain products.

### WARNINGS AND CAUTIONS

- The use of chain is subject to certain hazards that cannot be met by mechanical or manufacturing means, but only by the exercise of intelligence, care, and common sense
- **Do not exceed the working load limit of the chain or any component**
- Chemically active environments may adversely affect chain and components. Do not use in highly acidic or caustic environments. Campbell should be contacted if the chain will be exposed to chemically active environments during use
- High and low temperatures will affect chain and components. Campbell should be contacted if temperatures below -20°F (-29°C) or above 400°F (200°C) will be experienced
- Chains used in certain applications are subject to governmental regulations. Please follow all Federal, State and/or Local Department of Transportation, OSHA, or other applicable standards and regulations when using Campbell products
- Never field weld or repair chain
- See other specific information under "Inspection and Proper Use" sections

### INSPECTION

Regular inspections should be conducted on chain to detect damage or deterioration from use. The chain should be inspected for any of the below conditions. If present, the chain should immediately be removed from service.

- Cracks in the chain or any component
- Excessive nicks or gouges
- Excessive wear. Chain should be removed from service if the thickness at any point on the link is below the value shown in the Chain Minimum Allowable Thickness chart. All other components should be removed from service if any dimension is worn by more than 10% from the original dimension
- Stretched, bent, twisted, or distorted chain links or components
- Excessive corrosion
- Evidence of heat damage
- Evidence of field welding or weld splatter
- Any other condition which questions the integrity of the chain

### PROPER USE

To protect the users and to prevent damage to the chain, the following safe practices should be followed:

- Select a chain suitable for the application and environment

- The hooks or other components should be of a size to fit the intended connections
- Avoid shock loading
- Pad all sharp edges or corners in contact with the chain
- Rig so that the load is properly seated in the hooks or other components. Avoid tip loading of hooks and side loading of chain and components
- Avoid twisting or kinking the chain
- Never knot chain

Purchasers please note that all "Warnings and Cautions" apply to chain as well as all components and fittings. Purchasers are responsible for conveying the "Warnings and Cautions," including the "Inspection" and "Proper Use" section information to the end user.

Campbell denies any liability for damage that results from use in excess of the working load limit or any abuse or misuse of the product.

Any questions concerning the use of Campbell products may be directed to your CooperTools Sales representative or CooperTools Customer Service representative.

### OTHER PRODUCTS

Campbell produces a number of products for specialty applications. Please contact your Cooper Sales representative, or Customer Service representative, if you have special requirements.

Not all products produced by Campbell appear in this catalog. Campbell can produce engineered chain to meet customer design specifications, and also produces a variety of chain assemblies. Minimum order quantities may apply to special order products.

**NOTICE:** The product specifications and dimensions are as accurate as possible at the time of printing. However, because we are continually improving the quality and design of our products, they can change without notice.

The dimensions and weights are approximate nominal values, and some variation will occur. If specific dimensional requirements are necessary for the application, please contact your CooperTools Sales representative, or Customer Service representative.

# Care and Maintenance of Chain

Minimum Allowable Thickness Chart

Trade Size		Chain Type or Grade	Nominal Material Diameter		Min. Allowable Thickness on Link	
in.	mm		in.	mm	in.	mm
4	3.0	Machine, Coil	0.120	3.0	0.104	2.64
3	3.4	Machine, Coil	0.135	3.4	0.117	2.97
2	3.8	Machine, Coil	0.148	3.8	0.128	3.25
1	4.1	Machine, Coil	0.162	4.1	0.140	3.56
1/0	4.5	Machine, Coil	0.177	4.5	0.153	3.89
2/0	4.9	Machine, Coil, Passing Link	0.192	4.9	0.166	4.22
3/0	5.3	Machine, Coil	0.207	5.3	0.179	4.55
4/0	5.5	Machine, Coil, Passing Link	0.218	5.5	0.189	4.80
5/0	6.4	Machine, Coil	0.250	6.4	0.217	5.50
1/8	4.0	Grade 30	0.156	4.0	0.135	3.43
3/16	5.5	Grade 30, 80, 100	0.217	5.5	0.189	4.80
1/4-9/32	7.0	Grade 30, 43, 70, 80, 100 (Grade 43 = 0.281)	0.276	7.0	0.239	6.07
5/16	8.4	Grade 30	0.331	8.4	0.286	7.28
5/16	8.7	Grade 43, 70	0.343	8.7	0.297	7.54
5/16	8.0	Grade 80, 100	0.312	8.0	0.273	6.93
3/8	10.0	Grade 30, 80, 100	0.394	10.0	0.342	8.69
3/8	10.3	Grade 43, 70	0.406	10.3	0.351	8.93
7/16	11.9	Grade 30, 43, 70	0.468	11.9	0.405	10.30
1/2	13.0	Grade 30, 80, 100	0.512	13.0	0.443	11.26
1/2	13.5	Grade 43, 70	0.531	13.5	0.460	11.68
5/8	16.0	Grade 30, 43, 70	0.630	16.0	0.546	13.87
3/4	20.0	Grade 80, 100	0.787	20.0	0.687	17.45
7/8	20.0	Grade 30, 43, 80, 100	0.866	22.0	0.750	19.05
1	26.0	Grade 30, 80	1.020	26.0	0.887	22.53
1-1/4	32.0	Grade 80	1.260	32.0	1.091	27.71
1-1/2	38.0	Grade 63	1.500	38.0	1.300	32.99

**Warning:** Remove chain from service if the thickness is less than the minimum shown, at any location on the link

## Finish Abbreviations

- (S.C.) stands for Self Colored. A finish without any cleaning operations to remove oil or dirt or surface oxidation from the welding process
- (BRT) stands for Bright. A finish where the surface is cleaned by shot peening or tumbling to produce a clean bright surface
- (B.K.) stands for Blu-Krome®, a registered trade name for Campbell's method of zinc electroplating with a tinted blue chromate finish. The zinc electroplating is an attractive finish that also serves to prevent the onset of rust on the chain. The chromate finish serves to protect the zinc electroplate
- (Y.C.) stands for Yellow Chromate, a name for Campbell's method of zinc electroplating with a yellow chromate finish. The zinc electroplating is an attractive finish that also serves to prevent the onset of rust on the chain. The chromate finish serves to protect the zinc electroplate
- (GALV) stands for Hot-dip Galvanized. Hot-dip galvanizing is a process where the chain is immersed in molten zinc. This produces both a chemical reaction between the steel and the zinc, as well as an outside layer of zinc on the chain. The end result is an adherent coating of zinc that is much thicker than that produced by zinc electroplating. Corrosion resistance is proportional to zinc thickness, and therefore galvanized products offer superior corrosion resistance to electroplated products.  
**Note:** Due to the temperature of the molten zinc, the strengths of hot-dip galvanized products are often reduced by 15%
- (M-GALV) stands for Mechanically Galvanized. Mechanical galvanizing is a process where zinc powder is mechanically applied to the outside of the chain. Because this is a mechanical process and not a molten process, the coating is very uniform
- (Polycoated) is a finish where the chain is coated with a colored plastic powder which is then fused onto each link

### ADVERTENCIA

Para prevenir la posibilidad de una lesión personal sería:

- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** para cargar hacia arriba o para izar.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.

### WARNING

To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** for overhead lifting or hoisting.
- **DO NOT USE** if the chain or components are visibly distorted or worn.

### System 3, Proof Coil Chain (Grade 30)



Drums      Half Drums      Pails, including Anchor Lead      Square Pails      Reels

- Uses: Excellent general-purpose chain of standard commercial quality
- Frequently used for fabricating tow chains, binding or tie down chains and logging chains
- Standard Material: Low carbon steel
- Standard Finish: Self Colored (S.C.) or Galvanized (GALV); also available Blu-Krome (B.K.) 3/16" through 1/2" and polycoated
- Hallmarking: "C3" or "M3" on 5/16" (8mm) and larger
- Proof tested
- Packaging: Drums and half drums (order unit is "feet"), pails and refill reels to fit Campbell merchandisers (order unit is "each")
- **Do not use for overhead lifting**

### Drums, System 3, Proof Coil Chain (Order Unit is "Feet")

Nominal Dimensions (in. and mm)																		
Trade Size	Mat. Dia.		Inside Dimensions				Self Colored		Blu-Krome		Galvanized		Working Load Limit		Length/ft. per drum	Lb/100'	Links/ft.	
	in.	mm	in.	mm	in.	mm	Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418	lb	kg				
1/8	4	.16	4	.89	23	.29	7	0120202	056932	--	--	0120232	056949	400	180	1000	22	13.5
3/16	6	.21	6	.95	24	.34	9	0120302	056970	0120322	057007	0120332	057045	800	365	1000	35	12.6
1/4	7	.26	7	1.20	30	.45	11	0120402	057076	0120422	057106	0120432	057144	1300	580	800	56	10.0
5/16	8	.31	8	1.27	32	.47	12	0120502	057205	0120522	057243	0120532	057281	1900	860	550	83	9.4
3/8	10	.37	10	1.36	35	.57	14	0120602	057335	0120622	057373	0120632	057410	2650	1200	400	125	8.8
7/16	12	.47	12	1.37	35	.75	19	0120702	057441	--	--	0120732	057489	3700	1680	300	210	8.8
1/2	13	.51	13	1.70	43	.75	19	0120802	057502	0120822	057526	0120832	057557	4500	2030	200	238	7.1
5/8	16	.66	17	2.10	53	.87	22	0121002	057595	--	--	0121032	057618	6900	3130	150	390	5.7
3/4	20	.78	20	2.70	69	1.02	26	0121202	057632	--	--	0121232	057656	10,600	4800	100	536	4.4

7/8", 1" and 1 1/4" available upon request.

The last digit of the catalog number changes to a 1 if a non-standard quantity is ordered.

### Half Drums, System 3, Proof Coil Chain (Order Unit is "Feet")

Nominal Dimensions (in. and mm)																		
Trade Size	Mat. Dia.		Inside Dimensions				Self Colored		Blu-Krome		Galvanized		Working Load Limit		Ft. per Half drum	Lb/100'	Links/ft.	
	in.	mm	in.	mm	in.	mm	Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418	lb	kg				
3/16	6	.21	6	.95	24	.34	9	0120300	056956	--	--	0120330	057021	800	365	500	35	12.6
1/4	7	.26	7	1.20	30	.45	11	0120400	057052	--	--	0120430	057120	1300	580	400	56	10.0
5/16	8	.31	8	1.27	32	.47	12	0120500	057182	--	--	0120530	057267	1900	860	275	83	9.4
3/8	10	.37	10	1.36	35	.57	14	0120600	057311	--	--	0120630	057397	2650	1200	200	125	8.8

#### ⚠ ADVERTENCIA

Para prevenir la posibilidad de una lesión personal seria:

- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** para cargar hacia arriba o para izar.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.

#### ⚠ WARNING

To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** for overhead lifting or hoisting.
- **DO NOT USE** if the chain or components are visibly distorted or worn.

## Round Pails, System 3, Proof Coil Chain (Order Unit is "Each Pail")

Nominal Dimensions (in. and mm)																		
Trade Size	Mat. Dia.		Inside Dimensions				Self Colored		Blu-Krome		Galvanized		Working					
	in.	mm	in.	mm	in.	mm	Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418	Load Limit lb	kg	Ft. per pail ‡	Lb/ pail	Links/ ft.	
3/16	6	.21	6	.95	24	.34	9	--	--	<b>0140323</b>	057991	<b>0140333</b>	058004	800	365	250	88	12.6
1/4	7	.26	7	1.20	30	.45	11	--	--	<b>0140423</b>	058028	<b>0140433</b>	058035	1300	580	141	79	10.0
5/16	8	.31	8	1.27	32	.47	12	--	--	<b>0140523</b>	058059	<b>0140533</b>	058066	1900	860	92	76	9.4
3/8	10	.37	10	1.36	35	.57	14	--	--	<b>0140623</b>	058080	<b>0140633</b>	058097	2650	1200	63	79	8.8
1/2	13	.51	13	1.70	43	.75	19	--	--	<b>0140823</b>	058103	--	--	4500	2030	40	95	7.1

‡ Approximate.

## Round Pails, Anchor lead, System 3, Proof Coil Chain (Order Unit is "Each Pail")

Nominal Dimensions (in. and mm)														
Trade Size	Mat. Dia.		Inside Dimensions				Galvanized & PolyCoated **		Working		Feet/ ‡	Lb/ pail	Links/ ft.	
	in.	mm	in.	mm	in.	mm	in.	mm	Cat. No.	UPC No. 020418				Load Limit lb
1/4	7	.26	7	1.20	30	.45	11	<b>0200391</b>	164453	1300	580	141	79	10.0

\*\* White polycoated. ‡ Approximate.

## Square Pails, System 3, Proof Coil Chain (Order Unit is "Each Pail")

Nominal Dimensions (in. and mm)																		
Trade Size	Mat. Dia.		Inside Dimensions				Self Colored		Blu-Krome		Galvanized		Working					
	in.	mm	in.	mm	in.	mm	Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418	Load Limit lb	kg	Ft. per pail ‡	Lb/ pail	Links/ ft.	
1/8	4	.16	4	.89	23	.29	7	--	--	<b>0143226</b>	190360	--	--	400	180	200	44	13.5
1/8	4	.16	4	.89	23	.29	7	--	--	--	--	<b>0143236</b>	189326	400	180	325	72	13.5
3/16	6	.21	6	.95	24	.34	9	<b>0143316</b>	190667	<b>0143326</b>	183058	<b>0143336</b>	183065	800	365	150	53	12.6
1/4	7	.26	7	1.20	30	.45	11	<b>0143416</b>	190674	<b>0143426</b>	183072	<b>0143436</b>	183089	1300	580	100	56	10.0
5/16	8	.31	8	1.27	32	.47	12	<b>0143516</b>	190681	<b>0143526</b>	183096	<b>0143536</b>	183102	1900	860	75	62	9.4
3/8	10	.37	10	1.36	35	.57	14	<b>0143616</b>	190698	<b>0143626</b>	183119	<b>0143636</b>	183126	2650	1200	45	56	8.8

‡ Approximate.

**⚠ ADVERTENCIA**

Para prevenir la posibilidad de una lesión personal sería:

- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** para cargar hacia arriba o para izar.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.

**⚠ WARNING**

To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** for overhead lifting or hoisting.
- **DO NOT USE** if the chain or components are visibly distorted or worn.

## Square Pails, System 3, Proof Coil Chain (Order Unit is "Each Pail")

Nominal Dimensions (in. and mm)								Polycoated **		Working		Feet/ ‡	Lb/ pail	Links/ ft.
Trade Size	Mat. Dia.		Inside Dimensions				Cat. No.	UPC No. 020418	Load Limit					
in. mm	in. mm	in. mm	Length	Width				lb	kg					
5/16	8	.31	8	1.27	32	.47	12	HV0142526	187940	1900	860	75	62	9.4

\*\* Hi-visibility orange polycoated. ‡ Approximate.

## Square Pails, Anchor lead, System 3, Proof Coil Chain (Order Unit is "Each Pail")

Nominal Dimensions (in. and mm)								Galvanized & PolyCoated **		Working		Feet/ ‡	Lb/ pail	Links/ ft.
Trade Size	Mat. Dia.		Inside Dimensions				Cat. No.	UPC No. 020418	Load Limit					
in. mm	in. mm	in. mm	Length	Width				lb	kg					
5/16	8	.31	8	1.27	32	.47	12	0200356	183881	1900	860	75	62	9.4

\*\* White polycoated. ‡ Approximate.

## Reels, System 3, Proof Coil Chain (Order Unit is "Each Reel")

Nominal Dimensions (in. and mm)								Blu-Krome		Polycoated Yellow		Working		Feet/ Reel	Lb/ Reel	Reel Width in.
Trade Size	Mat. Dia.		Inside Dimensions				Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418	Load Limit					
in. mm	in. mm	in. mm	Length	Width						lb	kg					
3/16	6	.21	6	.95	24	.34	9	0725027	064982	PD0725027	184642	800	365	100	35	10.75
1/4	7	.26	7	1.20	30	.45	11	0722127	183270	--	--	1300	580	65	36	10.75
1/4	7	.26	7	1.20	30	.45	11	--	--	PD0722127	183393	1300	580	60	36	10.75
5/16	8	.31	8	1.27	32	.47	12	0722227	183287	--	--	1900	860	60	50	10.75
3/8	10	.37	10	1.36	35	.57	14	0722327	183294	--	--	2650	1200	35	44	10.75

### ⚠ ADVERTENCIA

Para prevenir la posibilidad de una lesión personal seria:

- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** para cargar hacia arriba o para izar.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.

### ⚠ WARNING

To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** for overhead lifting or hoisting.
- **DO NOT USE** if the chain or components are visibly distorted or worn.



## Drums, Marine, Proof Coil Chain (Order Unit is "Feet")

- An excellent low-carbon steel chain made with a shorter length than standard proof coil
- Packaging: Drums (order unit is "feet")
- Standard finish: Self-colored (S.C.) or Hot Dipped Galvanized (GALV)
- Proof tested



Drums



Nominal Dimensions (in. and mm)											Working		Feet/ drum	Lb/ 100'	Links/ foot
Trade Size	Mat. Dia.		Inside Dimensions				Cat. No.	UPC No. 020418	Load Limit						
in.	mm	in.	mm	Length in.	mm	Width in.			mm	lb	kg				
<b>Hot Dipped Galvanized</b>															
1/4	7	.28	7	1.00	25	.50	13	0128132	170645	1300	590	800	42	7.6	
5/16	8	.34	9	1.10	28	.50	13	0128232	170652	1900	862	550	115	6.7	
3/8	10	.41	10	1.23	31	.62	16	0128332	170669	2650	1202	400	166	5.9	
1/2	13	.53	13	1.50	38	.81	21	0128432	170676	4500	2041	200	286	4.7	
5/8	16	.66	16	1.84	47	.99	25	0128532	170683	6900	3130	150	413	6.5	
<b>Self-colored</b>															
1/4	7	.28	7	1.00	25	.50	13	0128102	182969	1300	590	800	42	7.6	
5/16	8	.34	9	1.10	28	.50	13	0128202	182976	1900	862	550	115	6.7	
3/8	10	.41	10	1.23	31	.62	16	0128302	182983	2650	1202	400	166	5.9	

## Drums, Mooring Chain (Order Unit is "Feet")

- An excellent low-carbon steel chain with a long link design for mooring applications
- The longer link allows the use of a shackle anywhere in the length of chain, not just at end links
- Greater Working Load Limit than Proof Coil
- Standard finish: Hot Dipped Galvanized (GALV)
- Packaging: Drums (order unit is "feet")
- Proof tested



Drums



Nominal Dimensions (in. and mm)											Working		Feet/ drum	Lb/ 100'	Links/ foot
Trade Size	Mat. Dia.		Inside Dimensions				Hot Dipped Galvanized		Load Limit						
in.	mm	in.	mm	Length in.	mm	Width in.	mm	Cat. No.	UPC No. 020418	lb	kg				
3/8	10	.39	10	1.58	40	.59	15	0129332	152108	3700	1678	400	134	--	
1/2	13	.51	13	2.05	52	.83	21	0129432	152092	6000	2721	200	230	--	
5/8	16	.63	16	2.52	64	.94	24	0129532	152078	9000	4082	150	340	--	
3/4	20	.79	20	3.00	76	1.16	29	0129632	152085	13500	6123	100	510	--	

### ⚠ ADVERTENCIA

Para prevenir la posibilidad de una lesión personal sería:

- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** para cargar hacia arriba o para izar.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.

### ⚠ WARNING

To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** for overhead lifting or hoisting.
- **DO NOT USE** if the chain or components are visibly distorted or worn.



### Drums, BBB Chain (Order Unit is "Feet")



- Made especially for windlass or pocket wheel applications, low carbon steel
- Packaged in drums, Order unit is "feet"
- Standard finish: Self-colored (S.C.) or Hot Galvanized
- Proof tested

Nominal Dimensions (in. and mm)								Cat. No.	UPC No. 020418	Working Load Limit		Feet/drum	Lb/100'	Links/foot
Trade Size	Mat. Dia.	Inside Dimensions				Length	Width			lb	kg			
in.	mm	in.	mm	in.	mm	in.	mm							
<b>Galvanized</b>														
5/16	8	.34	9	1.00	25	.50	13	<b>0150532</b>	058301	1950	885	550	114	12
3/8	10	.41	10	1.09	28	.62	16	<b>0150632</b>	058370	2750	1247	400	164	11
<b>Self-colored</b>														
9/16	14	.59	15	1.58	40	.78	20	<b>0150902</b>	058493	5875	2665	200	350	7

### System 4, High Test Chain (Grade 43)



Drums



Round Pails



Square Pails

- Uses: Designed for use in load binding, towing, logging and other applications requiring high strength
- Standard Material: Carbon steel
- Standard Finish: Bright (BRT) and Galvanized (GALV); Blu-Krome (B.K.) available in pails and reels
- Hallmarking: "C4" or "M4"

- Proof tested
- Packaging: Drums (order unit is "feet"), pails and refill reels to fit Campbell merchandisers (order unit is "each")
- **Do not use for overhead lifting**

### Drums, System 4, High Test Chain (Order Unit is "Feet")

Nominal Dimensions (in. and mm)								Bright Cat. No.	UPC No. 020418	Galvanized		Working Load Limit		Feet/Drum	Lb/100 ft.	Links/ft.
Trade Size	Mat. Dia.	Inside Dimensions				Length	Width			Cat. No.	UPC No. 020418	lb	kg			
in.	mm	in.	mm	in.	mm	in.	mm									
1/4	7	.28	7	1.20	30	.45	11	<b>0180412</b>	058769	<b>0180432</b>	058820	2600	1180	800	63	10.0
5/16	8	.34	9	1.27	32	.47	12	<b>0180512</b>	058851	<b>0180532</b>	058912	3900	1770	550	102	9.4
3/8	10	.39	10	1.15	29	.58	15	<b>0180612</b>	058943	<b>0180632</b>	059018	5400	2450	400	155	10.4
7/16	12	.47	12	1.29	33	.67	17	<b>0180712</b>	059049	--	--	7200	3270	300	216	9.3
1/2	13	.53	13	1.70	43	.75	19	<b>0180812</b>	059094	<b>0180832</b>	059155	9200	4170	200	260	7.1
5/8	16	.66	17	1.94	49	.93	24	<b>0181012</b>	059186	<b>0181032</b>	059216	13,000	5910	150	356	6.2
3/4	20	.78	20	2.21	56	1.10	28	<b>0181212</b>	059254	--	--	20,200	9180	100	581	5.4

The last digit of the catalog number changes to a 1 if a non-standard quantity is ordered.

#### ⚠ ADVERTENCIA

Para prevenir la posibilidad de una lesión personal seria:

- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** para cargar hacia arriba o para izar.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.

#### ⚠ WARNING

To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** for overhead lifting or hoisting.
- **DO NOT USE** if the chain or components are visibly distorted or worn.

## Round, Pails, System 4, High Test Chain (Order Unit is "Each Pail")

Nominal Dimensions (in. and mm)													Bright		Blu-Krome		Working		Feet/ ‡ Pail	Lb/ Pail	Links/ ft.
Trade Size	Mat. Dia.		Inside Dimensions				Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418	Load Limit										
in. mm	in. mm	in. mm	in. mm	in. mm	in. mm	lb					kg										
1/4	7	.28	7	1.20	30	.45	11	<b>0181413</b>	059278	<b>0181423</b>	059285	2600	1180	150	98	10.0					
5/16	8	.34	9	1.27	32	.47	12	<b>0181513</b>	059292	<b>0181523</b>	059308	3900	1770	100	105	9.4					
3/8	10	.39	10	1.15	29	.58	15	<b>0181613</b>	059315	<b>0181623</b>	059322	5400	2450	75	116	10.4					

‡ Approximate.

## Square, Pails, System 4, High Test Chain (Order Unit is "Each Pail")

Nominal Dimensions (in. and mm)													Bright		Blu-Krome		Working		Feet/ ‡ Pail	Lb/ Pail	Links/ ft.
Trade Size	Mat. Dia.		Inside Dimensions				Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418	Load Limit										
in. mm	in. mm	in. mm	in. mm	in. mm	in. mm	lb					kg										
1/4	7	.28	7	1.20	30	.45	11	<b>0184416</b>	183133	<b>0184436</b>	185861	2600	1180	100	66	10.0					
5/16	8	.34	9	1.27	32	.47	12	<b>0184516</b>	183140	<b>0184536</b>	185878	3900	1770	60	64	9.4					
3/8	10	.39	10	1.15	29	.58	15	<b>0184616</b>	183157	<b>0184636</b>	185885	5400	2450	40	63	10.4					

‡ Approximate.

## Square, Pails, System 4, High Test Chain (Order Unit is "Each Pail")

Nominal Dimensions (in. and mm)													Polycoated Hi-Visibility Orange		Blu-Krome		Working		Feet/ ‡ Pail	Lb/ Pail	Links/ ft.
Trade Size	Mat. Dia.		Inside Dimensions				Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418	Load Limit										
in. mm	in. mm	in. mm	in. mm	in. mm	in. mm	lb					kg										
5/16	8	.34	9	1.27	32	.47	12	<b>HV0184526</b>	187698	--	--	3900	1770	60	64	9.4					

‡ Approximate.

## Drums, Marine High Test Chain (Order Unit is "Feet")

- Made especially for windlass or pocket wheel applications requiring higher strength
- Packaged in drums, Order unit is "feet"
- Standard finish: Galvanized



Nominal Dimensions (in. and mm)													Galvanized		Working		Feet/ drum	Lb/ 100'	Links/ foot
Trade Size	Mat. Dia.		Inside Dimensions				Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418	Load Limit								
in. mm	in. mm	in. mm	in. mm	in. mm	in. mm	lb					kg								
5/16	8	.34	9	1.01	26	.48	12	<b>0183532</b>	176661	3900	1770	550	114	--					

### ⚠ ADVERTENCIA

Para prevenir la posibilidad de una lesión personal sería:

- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** para cargar hacia arriba o para izar.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.

### ⚠ WARNING

To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** for overhead lifting or hoisting.
- **DO NOT USE** if the chain or components are visibly distorted or worn.

### Drums, Sweep Chain (Order Unit is "Feet")



Drums

- Produced specifically for scallop and oyster dredging
- Thru hardened for wear resistance
- Packaged in drums, Order unit is "feet"
- Proof tested

Nominal Dimensions (in. and mm)								Bright	UPC No. 020418	Working		Feet/ drum	Lb/ 100'	Links/ foot
Trade Size	Mat. Dia.		Inside Dimensions Length		Width		Cat. No.			Load Limit lb	kg			
in.	mm	in.	mm	in.	mm	in.	mm							
5/8	16	.66	16	1.94	49	.93	24	0181092	179921	15800	7170	150	409	6.19

### Drums, Marine Alloy Trawl Chain (Order Unit is "Feet")



Midlink



Long Link

- Made of high strength, heat treated alloy steel
- Designed for use with the larger nets in the trawling industry
- Grade 80 strengths
- Proof tested
- Special heat treatment for the trawling industry
- Packaged in drums, Order unit is "feet"



Drums

Nominal Dimensions (in. and mm)								Bright	UPC No. 020418	Working		Feet/ drum	Lb/ 100'	Links/ foot
Trade Size	Mat.		Inside Dimensions Length		Width		Cat. No.			Load Limit lb	kg			
in.	mm		in.	mm	in.	mm								
1/2	13	Midlink	2.05	52	.83	21	0406512	190414	12000	5443	200	230	--	
1/2	13	Long link	3.13	80	.85	22	0407512	190452	12000	5443	200	190	--	
5/8	16	Midlink	2.52	64	.94	24	0406612	190421	18100	8210	150	340	--	
5/8	16	Long link	3.67	93	.88	22	0407612	190469	18100	8210	150	315	--	
3/4	19	Midlink	3.00	76	1.16	29	▽ 0406712	190438	28300	12837	100	510	--	
3/4	19	Long link	3.99	101	1.10	28	0407712	190476	28300	12837	100	480	--	
7/8	22	Midlink	4.00	102	1.10	28	0406812	190445	34200	15513	80	650	--	
7/8	22	Long link	4.62	117	1.20	30	0407812	190483	34200	15513	80	620	--	

▽ These items are made to order.

#### ⚠ ADVERTENCIA

Para prevenir la posibilidad de una lesión personal seria:

- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** para cargar hacia arriba o para izar.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.

#### ⚠ WARNING

To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** for overhead lifting or hoisting.
- **DO NOT USE** if the chain or components are visibly distorted or worn.

# System 7, Transport Chain (Grade 70)



Drums



Half Drums



Pails, including Anchor Lead



SquarePails



- Uses: For use in load binding, towing and logging
- Can be used in accordance with Department of Transportation regulations
- Standard Material: Heat treated carbon steel
- Standard Finish: Zinc electroplate with yellow chromate conversion coating
- Hallmarking: "C7" or "M7"
- Proof tested
- Packaging: Drums and half drums (order unit is "feet"), pails (order unit is "each")
- **Do not use for overhead lifting**

## Drums, System 7, Transport Chain (Order Unit is "Feet")

Trade Size	Nominal Dimensions (in. and mm)								Cat. No.	UPC No. 020418	Working Load Limit		Feet/ Drum	Lb/ 100 ft.	Links/ ft.
	Mat. Dia.		Inside Dimensions				UPC No. 020418	lb			kg				
	in.	mm	in.	mm	Length	Width									
1/4	7	.31	8	.94	24	.46	12	0510412	063763	3150	1430	800	94	12.8	
5/16	8	.34	9	1.01	26	.48	12	0510512	063800	4700	2130	550	111	11.9	
3/8	10	.41	10	1.36	35	.57	14	0510612	063848	6600	2990	400	150	8.8	
7/16	12	.47	12	1.29	33	.67	17	0510712	063886	8750	3970	300	212	9.3	
1/2	13	.53	13	1.70	43	.75	19	0510812	063916	11,300	5130	200	260	7.1	

The last digit of the catalog number changes to a 1 if a non-standard quantity is ordered.

## Half Drums, System 7, Transport Chain (Order Unit is "Feet")

Trade Size	Nominal Dimensions (in. and mm)								Cat. No.	UPC No. 020418	Working Load Limit		Feet/ Half Drum	Lb/ 100 ft.	Links/ ft.
	Mat. Dia.		Inside Dimensions				UPC No. 020418	lb			kg				
	in.	mm	in.	mm	Length	Width									
1/4	7	.31	8	.94	24	.46	12	0510410	063749	3150	1430	400	94	12.8	
5/16	8	.34	9	1.01	26	.48	12	0510510	063787	4700	2130	275	111	11.9	
3/8	10	.41	10	1.36	35	.57	14	0510610	063824	6600	2990	200	150	8.8	
1/2	13	.53	13	1.70	43	.75	19	0510810	063893	11300	5130	100	260	7.1	

**⚠ ADVERTENCIA**

Para prevenir la posibilidad de una lesión personal sería:

- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** para cargar hacia arriba o para izar.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.

**⚠ WARNING**

To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** for overhead lifting or hoisting.
- **DO NOT USE** if the chain or components are visibly distorted or worn.

### Round Pails, System 7, Transport Chain (Order Unit is "Each Pail")

Nominal Dimensions (in. and mm)										Working		Feet/ ‡	Lb/ Pail	Links/ ft.
Trade Size	Mat. Dia.		Inside Dimensions				Cat. No.	UPC No. 020418	Load Limit					
in.	mm	in.	mm	Length in.	mm	Width in.	mm			lb	kg			
1/4	7	.31	8	.94	24	.46	12	0510413	063770	3150	1430	150	139	12.8
5/16	8	.34	9	1.01	26	.48	12	0510513	063817	4700	2130	100	114	11.9
3/8	10	.41	10	1.36	35	.57	14	0510613	063855	6600	2990	75	113	8.8

‡ Approximate.

### Square Pails, System 7, Transport Chain (Order Unit is "Each Pail")

Nominal Dimensions (in. and mm)										Working		Feet/ ‡	Lb/ Pail	Links/ ft.
Trade Size	Mat. Dia.		Inside Dimensions				Cat. No.	UPC No. 020418	Load Limit					
in.	mm	in.	mm	Length in.	mm	Width in.	mm			lb	kg			
1/4	7	.31	8	.94	24	.46	12	0510426	183867	3150	1430	65	64	12.8
5/16	8	.34	9	1.01	26	.48	12	0510526	183874	4700	2130	50	60	11.9
3/8	10	.41	10	1.36	35	.57	14	0510626	186639	6600	2990	45	68	8.8

‡ Approximate.

### Drums, Tuna Net Chain (Order Unit is "Feet")



Drums

- Made of high strength, heat treated steel
- Designed for sinker lines and bridles in purse seining
- Hot dipped Galvanized (GALV)
- Proof tested
- Packaged in drums, Order unit is "feet"

Nominal Dimensions (in. and mm)										Working		Feet/ drum	Lb/ 100'	Links/ foot
Trade Size	Mat. Dia.		Inside Dimensions				Hot Dipped Galvanized		Load Limit					
in.	mm	in.	mm	Length in.	mm	Width in.	mm	Cat. No.	UPC No. 020418	lb	kg			
3/8	10	.39	10	1.36	34	.57	14	0514632	175480	5600	2550	400	155	9.75
7/16	12	.47	12	1.37	35	.75	19	0514732	064241	7500	3410	300	217	8.75
1/2	13	.50	13	1.70	43	.75	19	0514832	064272	9600	4360	200	238	7.75
5/8	16	.63	16	1.93	49	.87	22	0514932	177507	13500	6140	150	375	6.25

#### ⚠ ADVERTENCIA

Para prevenir la posibilidad de una lesión personal seria:

- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** para cargar hacia arriba o para izar.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.


#### ⚠ WARNING

To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** for overhead lifting or hoisting.
- **DO NOT USE** if the chain or components are visibly distorted or worn.

# Drums, Dock Fender Chain (Order Unit is "Feet")

- High tensile chain holds thick rubber fenders to dock sides
- Galvanized
- Packaged in drums, Order unit is "feet"

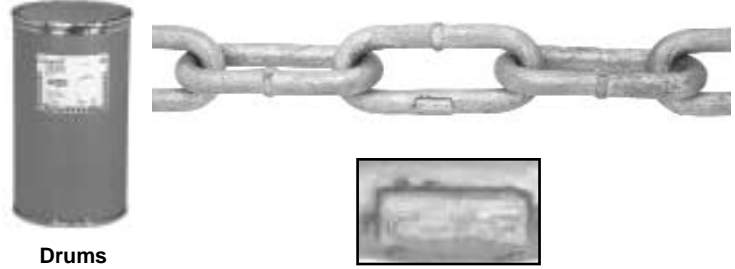

Drums

Nominal Dimensions (in. and mm)								Hot Dipped Galvanized		Working		Feet/ drum	Lb/ 100	Links/ foot
Nominal Size	Mat. Dia.		Inside Dimensions				Cat. No.	UPC No. 020418	Load Limit lb	kg				
in.	mm	in.	mm	in.	mm	in.	mm							
1/2	13	.53	13	3.50	89	.78	20	▽ 0516431	181870	7500	3410	--	205	--
5/8	16	.66	16	3.75	95	.90	23	▽ 0516531	181887	12500	5860	--	320	--
3/4	19	.78	20	3.75	95	1.13	29	▽ 0516631	181894	22300	10100	--	446	--
1	25	1.00	26	4.13	105	1.38	35	▽ 0516831	181917	40000	18200	--	614	--

▽ These items are made to order.

# Beacon 7 Fishing Chain



Drums



- Uses: Designed to accommodate all types of chain needs in the trawling and marine industry
- Standard Material: Heat treated carbon steel
- Standard Finish: Bright (BRT)
- Hallmarking: "CB" and a Lighthouse Beacon
- Proof tested
- Packaging: Drums (order unit is "feet")
- **Do not use for overhead lifting**

Nominal Dimensions (in. and mm)								Drum		Working		Feet/ Drum	Lb/ 100 ft.	Links/ ft.
Trade Size	Mat. Dia.		Inside Dimensions				Cat. No.	UPC No. 020418	Load Limit lb	kg				
in.	mm	in.	mm	in.	mm	in.	mm							
3/8	10	.39	10	1.58	40	.59	15	0520612	064302	6600	2990	200	134	7.6
1/2	13	.51	13	2.05	52	.83	21	0520812	064319	11,300	5130	200	230	5.9
5/8	16	.63	16	2.52	64	.94	24	0521012	064326	15,800	7167	200	340	4.8

## ⚠ ADVERTENCIA

Para prevenir la posibilidad de una lesión personal seria:

- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** para cargar hacia arriba o para izar.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.

## ⚠ WARNING

To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** for overhead lifting or hoisting.
- **DO NOT USE** if the chain or components are visibly distorted or worn.

### System 8, Cam-Alloy Chain (Grade 80)



Drums

- Uses: Specifically recommended for overhead lifting
- Standard Material: Alloy steel, heat treated
- Standard Finish: Bright (BRT)
- Hallmarking: "C8" or "CA8" and traceability code
- Proof tested
- Packaging: Continuous lengths in drums (order unit is "feet")

Nominal Dimensions (in. and mm)														
Trade Size	Mat. Dia.		Inside Dimensions				Drum		Working Load Limit		Feet/ Drum	Lb/ 100 ft.	Links/ ft.	
	in.	mm	in.	mm	in.	mm	in.	mm	Cat. No.	UPC No. 020418				lb
7/32	5.5	.22	6	.69	18	.30	8	<b>0400312</b>	063312	2100	970	800	43	17.5
5/16	8	.32	8	.94	24	.46	12	<b>0400512</b>	063367	4500	2000	500	92	12.8
1	26	1.00	25	2.80	71	1.40	36	<b>0401612</b>	063510	47,700	21,600	100	965	4.3
1 1/4	32	1.25	32	3.50	89	1.75	44	<b>0402012</b>	063534	72,300	32,800	60	1525	3.5
* 1 1/2	38	1.50	38	4.49	114	1.94	49	<b>0402412</b>	179808	80,000	36,300	45	2140	2.6

\* Manufactured to System 6 specifications.  
The last digit of the catalog number changes to a 1 if a non-standard quantity is ordered.

### System 10, Cam-Alloy Chain (Grade 100)



Drums

- Uses: Specifically recommended for overhead lifting. 25% stronger than System 8. Enables you to perform some lifts with lighter weight chain
- Standard Material: Alloy steel, heat treated
- Proof tested
- Standard Finish: Bright (BRT)
- System 10 chain should not be plated or galvanized
- Hallmarking: C10 and traceability code
- Packaging: Continuous lengths in drums (order unit is "feet")

Nominal Dimensions (in. and mm)														
Trade Size	Mat. Dia.		Inside Dimensions				Drum		Working Load Limit		Feet/ Drum	Lb/ 100 ft.	Links/ ft.	
	in.	mm	in.	mm	in.	mm	in.	mm	Cat. No.	UPC No. 020418				lb
9/32	7	.29	7	.86	22	.41	10	<b>0405212</b>	182204	4300	1950	500	74	13.8
3/8	10	.40	10	1.22	31	.55	14	<b>0405412</b>	182211	8800	4000	500	148	10.0
1/2	13	.52	13	1.57	40	.75	19	<b>0405512</b>	182228	15,000	6800	300	250	7.8
5/8	16	.64	16	1.93	49	.87	22	<b>0405612</b>	182235	22,600	10,300	200	379	6.5
3/4	20	.80	20	2.42	61	1.09	28	<b>0405712</b>	182242	35,300	16,000	100	598	5.5
7/8	22	.88	22	2.70	68	1.28	32	<b>0405812</b>	063497	42,700	19,400	100	775	4.4

The last digit of the catalog number changes to a 1 if a non-standard quantity is ordered.

#### ⚠️ ADVERTENCIA

- Para prevenir la posibilidad de una lesión personal seria:
- **NO EXCEDA** los límites de carga de las cadenas o componentes.
  - **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.

#### ⚠️ WARNING

- To prevent the possibility of serious bodily injury:
- **DO NOT EXCEED** the working load limits for chain or components.
  - **DO NOT USE** if the chain or components are visibly distorted or worn.



# Stainless Steel Chain



- Uses: Food processing, chemical and marine applications, wherever non-magnetic, electrically welded corrosion resistant chain is needed
- Standard Material: Type 316L Stainless
- Standard Finish: Bright (BRT)
- Hallmarking: SS6
- Proof tested
- Packaging: Bulk. Order unit is "feet"
- **Do not use for overhead lifting**

Nominal Dimensions (in. and mm)								Bright	UPC No.	Working Load Limit		Lb per 100 ft.	Links / ft.
Trade Size	Mat. Dia.		Inside Dimensions				Cat. No.			020418	lb		
in.	mm	in.	mm	in.	mm	in.	mm						
1/8	4	.16	4	.94	24	.26	7	<b>0192411</b>	177422	410	186	21	12.8
7/32	5	.22	6	.95	24	.38	10	<b>0192711</b>	176043	1200	545	41	12.6
9/32	7	.28	7	.86	22	.45	11	<b>0192911</b>	176050	2000	907	75	14.0
5/16	8	.31	8	.94	24	.46	12	<b>0193111</b>	176067	2400	1089	95	12.8
3/8	10	.38	10	1.10	28	.55	14	<b>0193311</b>	176074	3550	1610	138	11.0
1/2	13	.50	13	1.55	39	.72	18	<b>0193511</b>	176081	6500	2948	245	7.7

▽ These items are made to order.  
 Working load limits (WLL) shown are room temperatures. Reduce WLL by 15% for temperatures up to 250°F, 25% between 250°F and 800°F, 33% between 800°F and 1000°F, 50% between 1000°F and 1200°F, and 60% between 1200°F and 1400°F.

# Aluminum Chain



- Uses: Chemical processing, petroleum refining, food processing, landscaping, crowd control, wherever a non-magnetic, non-sparking chain is needed
- Standard Material: 5056 aluminum-magnesium alloy
- Standard Finish: Bright (BRT)
- Proof tested
- Packaging: Bulk order unit is "feet"
- **Do not use for overhead lifting or dynamic load conditions**

Nominal Dimensions (in. and mm)								Cat. No.	UPC No.	Working Load Limit		Lb/100	Links/ft.
Trade Size	Mat. Dia.		Inside Dimensions				020418			lb	kg		
in.	mm	in.	mm	in.	mm	in.	mm						
17/64	7	.26	7	1.06	27	.37	9	<b>0635211</b>	176098	550	249	19	11.3
5/16	8	.34	9	1.14	29	.49	12	<b>0635311</b>	176104	850	380	36	10.5

**⚠ ADVERTENCIA**

Para prevenir la posibilidad de una lesión personal sería:

- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** para cargar hacia arriba o para izar.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.

**⚠ WARNING**

To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** for overhead lifting or hoisting.
- **DO NOT USE** if the chain or components are visibly distorted or worn.

### Straight Link Machine Chain



Individual chain links shown actual size in reference section page 45.



Carton



Reel

- Uses: General utility; farm and animal
- Standard Material: Low carbon steel
- Standard Finish: Bright (BRT), Blu-Krome (B.K.) and Brass Glo
- Proof tested
- Packaging: 100-foot cartons (order unit is "feet"), refill reels to fit Campbell merchandisers (order unit is "each")
- Do not use for overhead lifting

### Carton - Straight Link Machine Chain (Order Unit is "Feet")

Trade Size	Mat. Dia.		Inside Dimensions				Bright		Blu-Krome		Galvanized		Working Load Limit		Length	
	in.	mm	Length in.	mm	Width in.	mm	Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418	lb	kg	Carton/ft.	Lb/ Links/ 100' ft.
4	.12	3	.55	14	.21	5	--	--	<b>0310424</b>	060908	--	--	215	98	100	11 21.8
3	.14	3	.59	15	.24	6	--	--	<b>0310324</b>	060878	--	--	270	122	100	15 20.3
2	.15	4	.61	15	.26	7	--	--	<b>0310224</b>	060847	--	--	325	147	100	19 19.7
1	.16	4	.63	16	.28	7	--	--	<b>0310124</b>	060816	--	--	390	177	100	23 19.0
1/0	.18	4	.74	19	.31	8	--	--	<b>0311024</b>	060946	--	--	465	211	100	27 16.2
2/0	.19	5	.78	20	.34	9	<b>0312014</b>	060977	<b>0312024</b>	060984	--	--	545	247	100	33 15.4
3/0	.21	5	1.01	26	.36	9	--	--	<b>0313024</b>	061011	--	--	635	288	100	37 11.9
4/0	.23	6	1.03	26	.38	10	<b>0314014</b>	061035	<b>0314024</b>	061042	--	--	700	318	100	47 11.7
5/0	.25	6	1.07	27	.44	11	<b>0315014</b>	061073	<b>0315024</b>	061080	--	--	925	420	100	52 11.2

### Reels-Straight Link Machine Chain (Order Unit is "Each Reel")

Trade Size	Mat. Dia.		Inside Dimensions				Blu-Krome		Brass Glo		Working Load Limit		Feet/ Reel	Lb/ Reel	Links/ ft.	Reel Width in.
	in.	mm	Length in.	mm	Width in.	mm	Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418	lb	kg				
4	.12	3	.55	14	.21	5	<b>AW0310427</b>	145384	--	--	215	98	100	12	22	3.5
3	.14	3	.59	15	.24	6	--	--	<b>0723367</b>	064814	270	122	50	9	20	3.5
2	.15	4	.61	15	.26	7	<b>0726727</b>	184475	--	--	325	147	125	26	19.7	10.75

(Reels used on Campbell merchandisers)

#### ⚠ ADVERTENCIA

Para prevenir la posibilidad de una lesión personal seria:

- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** para cargar hacia arriba o para izar.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.

#### ⚠ WARNING

To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** for overhead lifting or hoisting.
- **DO NOT USE** if the chain or components are visibly distorted or worn.

# Twist Link Machine Chain



Individual chain links shown actual size in reference section page 45.

- Uses: General utility
- Standard Material: Low carbon steel
- Standard Finish: Bright (BRT), Blu-Krome (B.K.), Galvanized (GALV) and Brass Glo
- Packaging: 100 ft. cartons (order unit is "feet"), refill reels to fit Campbell merchandisers (order unit is "each") and pails (order unit is "each")
- Do not use for overhead lifting

## Cartons - Twist Link Machine Chain (Order Unit is "Feet")

Trade Size	Mat. Dia.		Inside Dimensions				Bright Cat. No.	UPC No. 020418	Blu-Krome		Galvanized		Working Load Limit		Length Carton/ft.	Lb/100'	Links/ft.
	in.	mm	in.	mm	in.	mm			Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418	lb	kg			
3	.14	3	.56	14	.20	5	0320314	061158	0320324	061165	--	--	255	116	100	16	21.4
2	.15	4	.58	15	.21	5	0320214	061127	0320224	061134	--	--	310	141	100	20	20.7
1/0	.18	4	.68	17	.26	7	--	--	0321024	061219	--	--	440	200	100	28	17.6
2/0	.19	5	.73	19	.28	7	0322014	061233	--	--	--	--	520	236	100	34	16.4
4/0	.23	6	.89	23	.32	8	--	--	0324024	061301	--	--	670	304	100	48	13.5
5/0	.25	6	1.00	25	.37	9	--	--	--	--	0325034	061349	880	399	100	56	12.0

## Reels-Twist Link Machine Chain (Order Unit is "Each Reel")

Trade Size	Mat. Dia.		Inside Dimensions				Brass Glo Cat. No.	UPC No. 020418	Blu-Krome		Working Load Limit		Feet/Reel	Lb/Reel	Links/ft.	Reel Width in.
	in.	mm	in.	mm	in.	mm			Cat. No.	UPC No. 020418	lb	kg				
4	.12	3	.52	13	.17	4	--	--	AW0320427	145391	205	93	100	13	14	3.5
2	.15	4	.58	15	.21	5	0723388	064838	--	--	310	141	70	15	20.7	3.5
2	.15	4	.58	15	.21	5	--	--	0726627	184468	310	141	125	27	20.7	5.5
2/0	.19	5	.73	19	.28	7	--	--	0722527	183300	520	236	70	25	16	5.5

## Rd. Pail-Twist Link Machine Chain (Order Unit is "Each Pail")

Trade Size	Mat. Dia.		Inside Dimensions				Cat. No.	UPC No. 020418	Working Load Limit		Feet/ ‡ Pail	Lb/ Pail	Links/ft.
	in.	mm	in.	mm	in.	mm			lb	kg			
2/0	.19	5	.73	19	.28	7	0329500	169434	520	236	300	102	16.4

‡ Approximate.

**⚠ ADVERTENCIA**

Para prevenir la posibilidad de una lesión personal seria:

- NO EXCEDA los límites de carga de las cadenas o componentes.
- NO LA UTILICE para cargar hacia arriba o para izar.
- NO LA UTILICE si la cadena o los componentes están visualmente distorsionados o gastados.

**⚠ WARNING**

To prevent the possibility of serious bodily injury:

- DO NOT EXCEED the working load limits for chain or components.
- DO NOT USE for overhead lifting or hoisting.
- DO NOT USE if the chain or components are visibly distorted or worn.

### Square Pails - Twist Link Machine Chain (Order Unit is "Each Pail")

Trade Size	Nominal Dimensions (in. and mm)								Cat. No.	UPC No. 020418	Working Load Limit		Feet/ ‡ Pail	Lb/ Pail	Links/ ft.
	Mat. Dia.		Inside Dimensions				Cat. No.	UPC No. 020418			lb	kg			
	in.	mm	Length in.	mm	Width in.	mm									
2/0	.19	5	.73	19	.28	7	0322026	183171	520	236	175	62	16.4		

‡ Approximate.

### Straight Link Coil Chain



Individual chain links shown actual size in reference section page 45.



Carton



Reel



Round Pail



Square Pail

- Uses: Typical uses include tailgates, barrier guards, animal ties
- Standard Material: Low carbon steel
- Standard Finish: Blu-Krome (B.K.) and polycoated
- Proof tested
- Packaging: 100-foot cartons (order unit is "feet"), pails (order unit is "each"), refill reels to fit Campbell merchandisers (order unit is "each")
- **Do not use for overhead lifting**

### Cartons - Straight Link Coil Chain (Order Unit is "Feet")

Trade Size	Nominal Dimensions (in. and mm)								Bright Cat. No.	UPC No. 020418	Blu-Krome		Galvanized		Working Load Limit		Length ft./ Carton	Lb/ 100'	Links/ ft.
	Mat. Dia.		Inside Dimensions				Cat. No.	UPC No. 020418			Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418	lb	kg			
	in.	mm	Length in.	mm	Width in.	mm													
4	.12	3	1.11	28	.21	5	--	--	0330424	061455	--	--	205	93	100	10	10.8		
3	.14	3	1.17	30	.24	6	--	--	0330324	061424	--	--	255	116	100	13	10.3		
2	.15	4	1.18	30	.26	7	--	--	0330224	061394	--	--	310	141	100	15	10.2		
1	.16	4	1.25	32	.28	7	--	--	0330124	061363	--	--	370	168	100	19	9.6		
1/0	.18	4	1.25	32	.31	8	--	--	0331024	061516	--	--	440	200	100	22	9.6		
2/0	.19	5	1.29	33	.32	8	--	--	0332024	061578	--	--	520	236	100	27	9.3		
3/0	.21	5	1.30	33	.36	9	--	--	0333024	061622	--	--	605	274	100	31	9.2		
4/0	.22	6	1.39	35	.38	10	--	--	0334024	061660	--	--	670	304	100	35	8.6		
5/0	.25	6	1.52	39	.44	11	--	--	0335024	061721	--	--	880	399	100	46	7.9		

#### ⚠ ADVERTENCIA

Para prevenir la posibilidad de una lesión personal seria:

- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** para cargar hacia arriba o para izar.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.

#### ⚠ WARNING

To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** for overhead lifting or hoisting.
- **DO NOT USE** if the chain or components are visibly distorted or worn.

# Reels-Straight Link Coil Chain (Order Unit is "Each Reel")

Trade Size	Mat. Dia.		Inside Dimensions				Yellow Polycoated		Blu-Krome		Working Load Limit		Feet/ Reel	Lb/ Reel	Links/ ft.	Reel Width in.
	in.	mm	in.	mm	in.	mm	Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418	lb	kg				
4	.12	3	1.11	28	.21	5	--	--	<b>AW0330427</b>	145445	205	93	100	11	10.8	3.5
2	.15	4	1.18	30	.26	7	--	--	<b>0726827</b>	184482	310	141	125	21	10.2	10.75
2/0	.19	5	1.29	33	.32	8	--	--	<b>0722827</b>	183843	520	236	40	14	9.3	10.75
2/0	.19	5	1.29	33	.32	8	--	--	<b>0723627</b>	064869	520	236	125	37	9.3	10.75
2/0	.19	5	1.29	33	.32	8	<b>PD0722627</b>	183409	--	--	520	236	120	35	9.3	10.75
3/0	.21	5	1.30	33	.36	9	--	--	<b>0724527</b>	175732	605	274	100	31	9.2	10.75

# Round Pails - Straight Link Coil Chain (Order Unit is "Each Pail")

Trade Size	Mat. Dia.		Inside Dimensions				Blu-Krome		Working Load Limit		Feet/ ‡ Pail	Lb/ Pail	Links/ ft.
	in.	mm	in.	mm	in.	mm	Cat. No.	UPC No. 020418	lb	kg			
2/0	.19	5	1.29	33	.32	8	<b>0332023</b>	061561	520	236	400	108	9.3

‡ Approximate

# Square Pails - Straight Link Coil Chain (Order Unit is "Each Pail")

Trade Size	Mat. Dia.		Inside Dimensions				Blu-Krome		Working Load Limit		Feet/ ‡ Pail	Lb/ Pail	Links/ ft.
	in.	mm	in.	mm	in.	mm	Cat. No.	UPC No. 020418	lb	kg			
1	.16	4	1.25	32	.28	7	<b>0330126</b>	187643	370	168	350	66	9.6
1/0	.18	4	1.25	32	.31	8	<b>0331026</b>	187667	440	200	250	55	9.6
2/0	.19	5	1.29	33	.32	8	<b>0332426</b>	183188	520	236	225	62.8	9.3
5/0	.25	6	1.52	39	.44	11	<b>0335026</b>	187674	880	399	140	69	7.9

‡ Approximate

**⚠ ADVERTENCIA**

Para prevenir la posibilidad de una lesión personal sería:

- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** para cargar hacia arriba o para izar.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.

**⚠ WARNING**

To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** for overhead lifting or hoisting.
- **DO NOT USE** if the chain or components are visibly distorted or worn.

### Studio Chain



Carton

- Uses: Hanging theatrical lights and fixtures
- Standard Material: Low carbon steel
- Standard Finish: Bright (BRT)
- Proof tested
- Packaging: 100 feet, cartons
- **Do not use for overhead lifting**

### Carton - Studio Chain (Order unit is "Feet")

Nominal Dimensions (in. and mm)								Cat. No.	UPC No. 020418	Working Load Limit		Lb/100 ft.	Links/ft.
Trade Size	Mat. Dia.	Inside Dimensions		Length	Width	lb	kg						
in.	mm	in.	mm					in.	mm			ft.	ft.
6/0	--	.28	7	1.50	38	.47	12	<b>0336014</b>	176517	1100	499	63	8

### Twist Link Coil Chain



Carton



Reel

Individual chain links shown actual size in reference section page 46.

- Uses: Typical uses include tailgates, barrier guards, animal ties. Difference over straight link is twist link chain lies flat
- Standard Material: Low carbon steel
- Standard Finish: Blu-Krome (B.K.), Brass-Glo
- Packaging: 100-foot cartons (order unit is "feet"), refill reels to fit Campbell merchandisers (order unit is "each")
- **Do not use for overhead lifting**

### Cartons - Twist Link Coil Chain (Order Unit is "Feet")

Nominal Dimensions (in. and mm)								Blu-Krome Cat. No.	UPC No. 020418	Working Load Limit		Feet/ Carton	Lb/ 100'	Links/ ft.
Trade Size	Mat. Dia.	Inside Dimensions		Length	Width	lb	kg							
in.	mm	in.	mm					in.	mm					
3	.14	3	1.14	29	.21	5	<b>0340324</b>	061868	240	109	100	13	10.5	

#### ⚠️ ADVERTENCIA

Para prevenir la posibilidad de una lesión personal seria:

- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** para cargar hacia arriba o para izar.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.

#### ⚠️ WARNING

To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** for overhead lifting or hoisting.
- **DO NOT USE** if the chain or components are visibly distorted or worn.

## Reels - Twist Link Coil Chain (Order Unit is "Each Reel")

Trade Size	Mat. Dia.		Inside Dimensions				Brass Glo Cat. No.	UPC No. 020418	Blu-Krome Cat. No.	UPC No. 020418	Working Load Limit		Feet/ Reel	Lb/ Reel	Links/ ft.	Reel Width in.
	in.	mm	Length in.	mm	Width in.	mm					lb	kg				
3	.14	3	1.14	29	.21	5	0723167	064777	--	--	240	109	50	7.5	10.5	3.5
1/0	.18	4	1.22	31	.27	7	--	--	AW0341027	145490	415	188	100	16	9.8	5.5

## Passing Link Chain



Carton



Reel



Square Pail



Individual chain links shown actual size in reference section page 46.

- Uses: General utility, farm and animal
- Standard Material: Low carbon steel
- Standard Finish: Blu-Krome (B.K.) and Galvanized (GALV)
- Proof tested
- Packaging: 100 ft. cartons (order unit is "feet"), refill reels to fit Campbell merchandisers (order unit is "each")
- Do not use for overhead lifting

## Cartons - Passing Link Chain (Order unit is "Feet")

Trade Size	Mat. Dia.		Inside Dimensions				Blu-Krome Cat. No.	UPC No. 020418	Galvanized Cat. No.	UPC No. 020418	Working Load Limit		Length/ Carton Feet	Lb/ 100'	Links/ ft.
	in.	mm	Length in.	mm	Width in.	mm					lb	kg			
2/0	.19	5	.88	22	.47	12	--	--	0302034	060762	450	204	100	32	13.8
4/0	.22	6	.88	22	.50	13	0304024	060786	--	--	600	272	100	43	13.8

## Reels - Passing Link Chain (Order Unit is "Each Reel")

Trade Size	Mat. Dia.		Inside Dimensions				Blu-Krome Cat. No.	UPC No. 020418	Working Load Limit		Feet/ Reel	Lb/ Reel	Links/ ft.	Reel Width in.
	in.	mm	Length in.	mm	Width in.	mm			lb	kg				
2/0	.19	5	.88	22	.47	12	0722927	183317	450	204	125	42.5	13.75	10.75
2/0	.19	5	.88	22	.47	12	0722957	183478	450	204	50	20.8	13.75	10.75

### ⚠ ADVERTENCIA

Para prevenir la posibilidad de una lesión personal sería:

- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** para cargar hacia arriba o para izar.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.

### ⚠ WARNING

To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** for overhead lifting or hoisting.
- **DO NOT USE** if the chain or components are visibly distorted or worn.



## Square Pails - Passing Link Chain (Order Unit is "Each Pail")

Trade Size	Nominal Dimensions (in. and mm)						Blu-Krome		Working Load Limit		Feet/ ‡ Pail	Lb/ Pail	Links/ ft.
	Mat. Dia.		Inside Dimensions			Cat. No.	UPC No. 020418	lb	kg				
	in.	mm	Length in.	mm	Width in.					mm			
2/0	.19	5	.88	22	.47	12	0309526	183164	450	204	200	65	13.8

‡ Approximate

## Handy Link Utility Chain



Square Pail



Reel

- Uses: For hanging fixtures and plants, animal ties
- Standard Material: Low carbon steel
- Standard Finish: Blu-Krome (B.K.)
- Proof tested
- Packaging: Refill reels (order unit is "each"), 500 foot square pails (order unit is "each")
- **Do not use for overhead lifting**

## Square Pails - Handy Link Utility Chain (Order Unit is "Each Pail")

Trade Size	Nominal Dimensions (in. and mm)						Blu-Krome		Working Load Limit		Feet/ ‡ Pail	Lb/ Pail	Links/ ft.
	Mat. Dia.		Inside Dimensions			Cat. No.	UPC No. 020418	lb	kg				
	in.	mm	Length in.	mm	Width in.					mm			
135	.14	3	.14	3	.34	9	0339626	183195	255	116	500	63	8.9

‡ Approximate

## Reels - Handy Link Utility Chain (Order Unit is "Each Reel")

Trade Size	Nominal Dimensions (in. and mm)						Blu-Krome		Working Load Limit		Feet/ Reel	Lb/ Reel	Links/ ft.	Reel Width in.
	Mat. Dia.		Inside Dimensions			Cat. No.	UPC No. 020418	lb	kg					
	in.	mm	Length in.	mm	Width in.					mm				
135	.14	3	1.35	34	.34	9	0723169	064784	255	116	175	25	8.9	10.75

### ⚠ ADVERTENCIA

Para prevenir la posibilidad de una lesión personal seria:

- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** para cargar hacia arriba o para izar.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.

### ⚠ WARNING

To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** for overhead lifting or hoisting.
- **DO NOT USE** if the chain or components are visibly distorted or worn.

# Lock Link, Single Loop Chain



Carton



Reel



Individual chain links shown actual size in reference section page 46.



Sheared



Wrapped

- Uses: Ideal for sprocket wheel, overhead door chains, general utility use
- Standard Material: Low carbon steel, also available in stainless and brass on special order
- Standard Finish: Blu-Krome (B.K.), Galvanized (GALV)
- Packaging: 100 ft. cartons (order unit is "feet") and on reels to fit Campbell merchandisers (order unit is "each")
- **Do not use for overhead lifting**

## Cartons - Lock Link, Single Loop Chain (Order Unit is "Feet")

Trade Size	Mat. Dia.		Inside Dimensions				Blu-Krome		Galvanized		Standard End Types		Working Load Limit		Length ft./carton	Lb/100'	Links/ft.
	in.	mm	in.	mm	in.	mm	Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418	Wrapped	Sheared	lb	kg			
2	.09	2	1.08	27	--	--	<b>0740224</b>	066238	<b>0740234</b>	066252	--	x	155	70	100	9	11.1
1/0	.12	3	1.29	33	--	--	<b>0741024</b>	066290	<b>0741034</b>	066320	x	--	265	120	100	16	9.3
2/0	.14	3	1.48	38	--	--	<b>0742024</b>	066375	<b>0742034</b>	066399	x	--	340	154	100	23	8.1
3/0	.15	4	1.63	41	--	--	<b>0743024</b>	066412	--	--	x	--	405	184	100	26	7.4
4/0	.16	4	1.80	46	--	--	<b>0744024</b>	066481	<b>0744034</b>	066511	x	--	485	220	100	29	6.7
5/0	.18	4	2.15	55	--	--	<b>0745024</b>	066566	<b>0745034</b>	066597	x	--	580	263	100	34	5.6

## Reels - Lock Link, Single Loop Chain (Order Unit is "Each Reel")

Trade Size	Mat. Dia.		Inside Dimensions				Blu-Krome		Galvanized		Standard End Types		Working Load Limit, Steel		Feet/Reel	Lb/Reel	Links/ft.	Reel Width in.
	in.	mm	in.	mm	in.	mm	Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418	Wrapped	Sheared	lb	kg				
2	.09	2	1.08	27	--	--	--	--	<b>0740237</b>	066269	--	x	155	70	360	45	11.1	10.75
1/0	.12	3	1.29	33	<b>0741027</b>	066306	<b>0741037</b>	066337	x	--	265	120	250	40	9.3	10.75		
3/0	.15	4	1.63	41	<b>0723427</b>	064845	--	--	x	--	405	184	125	33	7.4	10.75		
3/0	.15	4	1.63	41	<b>0722427</b>	183454	--	--	x	--	405	184	50	16.5	7.4	10.75		
4/0	.16	4	1.80	46	<b>0744027</b>	066498	<b>0744037</b>	066528	x	--	485	220	100	29	6.7	10.75		
5/0	.18	4	2.15	55	--	--	<b>0745037</b>	066603	x	--	580	263	100	34	5.6	10.75		

### ⚠ ADVERTENCIA

Para prevenir la posibilidad de una lesión personal sería:

- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** para cargar hacia arriba o para izar.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.

### ⚠ WARNING

To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** for overhead lifting or hoisting.
- **DO NOT USE** if the chain or components are visibly distorted or worn.

## Brass Safety (Plumber's) Chain



Carton



Reel

- Uses: Plumbing fixtures, and other applications requiring light flat metal chain
- Standard Material: Brass
- Standard Finish: Bright (BRT)
- Packaging: 100 foot cartons (order unit is "feet") and on reels to fit Campbell merchandisers (order unit is "each")
- **Do not use for overhead lifting**

## Cartons - Brass Safety (Plumber's) Chain (Order Unit is "Feet")

Nominal Dimensions (in. and mm)													
Trade Size	Stock Thickness		Inside Dimensions Length		Bright		Blu-Krome		Working Load Limit		Feet/ Ctn.	Lb/ 100 Feet	Links/ ft.
	in.	mm	in.	mm	Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418	lb	kg			
2/0	.02	1	.55	14	0872014	067877	--	--	23	10	100	2	21.8
1/0	.02	1	.55	14	0871014	067839	--	--	35	16	100	2	21.8
1	.03	1	.65	14	0870114	067778	--	--	45	20	100	4	18.5

## Reels - Brass Safety (Plumber's) Chain (Order Unit is "Each Reel")

Nominal Dimensions (in. and mm)														
Trade Size	Stock Thickness		Inside Dimensions Length		Bright		Blu-Krome		Working Load Limit		Feet/ Reel	Lb/ Reel	Links/ ft.	Reel Width in.
	in.	mm	in.	mm	Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418	lb	kg				
1/0	.02	1	.55	14	0723817	064883	--	--	35	16	200	5	21.8	3.5

### ⚠️ ADVERTENCIA

Para prevenir la posibilidad de una lesión personal seria:

- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** para cargar hacia arriba o para izar.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.

### ⚠️ WARNING

To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** for overhead lifting or hoisting.
- **DO NOT USE** if the chain or components are visibly distorted or worn.

# Inco Double Loop Chain



Carton



Reel



Round Pail



Square Pail



Individual chain links shown actual size in reference section page 46.



PS0722027 See page 28 for chart.

- Uses: Playground and gymnasium equipment (1/0 and larger), farm and animal chains, and many general-purpose applications
- Standard Material: Low carbon steel
- Standard Finish: Blu-Krome (B.K.), Galvanized (GALV) and polycoated
- Packaging: 100 foot cartons, (order unit is "feet") and

on reels and pails to fit Campbell merchandisers (order unit is "each")

- **Do not use for overhead lifting**
- Note: The Playground Equipment Association has adopted 1/0 Inco coil chain as a minimum size chain for swing sets. Avoid twisting in suspension applications.

## Cartons - Inco, Double Loop Chain (Order Unit is "Feet")

Trade Size	Mat. Dia.		Inside Dimensions				Blu-Krome		Galvanized		Working Load Limit		Feet/ Ctn.	Lb/ 100 ft.	Links/ ft.
	in.	mm	Length in.	mm	Width in.	mm	Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418	lb	kg			
†5	.06	2	.92	23	--	--	<b>0750524</b>	066856	--	--	55	25	100	4	13.0
†4	.07	2	1.00	25	--	--	<b>0750424</b>	066818	--	--	70	32	100	5	12.0
†3	.08	2	1.10	28	--	--	<b>0750324</b>	066764	<b>0750334</b>	066788	90	41	100	6	10.9
†2	.09	2	1.33	34	--	--	<b>0750224</b>	066696	--	--	115	52	100	8	9.0
†1	.11	3	1.54	39	--	--	<b>0750124</b>	066641	--	--	155	70	100	10	7.8
1/0	.12	3	1.78	45	--	--	--	--	<b>0751034</b>	066924	200	91	100	13	6.7
2/0	.14	3	2.17	55	--	--	<b>0752024</b>	066979	<b>0752034</b>	067006	255	116	100	16	5.5
4/0	.16	4	2.19	56	--	--	--	--	<b>0754034</b>	067105	365	166	100	25	5.5
8/0	.23	6	2.90	74	--	--	--	--	<b>0758034</b>	067167	705	320	100	51	4.1

† Not recommended for use in swing sets.

## Round Pails - Inco, Double Loop Chain (Order Unit is "Each Pail")

Trade Size	Mat. Dia.		Inside Dimensions				Blu-Krome		Working Load Limit, Steel		Feet/ ‡ Pail	Lb/ Pail	Links/ ft.
	in.	mm	Length in.	mm	Width in.	mm	Cat. No.	UPC No. 020418	lb	kg			
2/0	.14	3	2.17	55	--	--	<b>0752023</b>	066962	255	116	350	56	5.5

‡ Approximate

### ⚠ ADVERTENCIA

Para prevenir la posibilidad de una lesión personal seria:

- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** para cargar hacia arriba o para izar.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.

### ⚠ WARNING

To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** for overhead lifting or hoisting.
- **DO NOT USE** if the chain or components are visibly distorted or worn.

### Square Pails - Inco, Double Loop Chain (Order Unit is "Each Pail")

Trade Size	Mat. Dia.	Nominal Dimensions (in. and mm)				Blu-Krome		White Polycoated		Yellow Polycoated		Working Load limit		Feet/ ‡	Lb/ Pail	Links/ ft.	
		Inside Length	Width	Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418	lb	kg						
†3	.08	2	1.10	28	-	-	<b>0754326</b>	183348	--	--	--	--	90	41	750	47	10.9
†1	.11	3	1.54	39	-	-	<b>0754126</b>	183331	--	--	--	--	155	70	450	45	7.8
2/0	.14	3	3.17	81	-	-	<b>0752426</b>	183324	--	--	--	--	255	116	275	50	5.5
2/0	.14	3	2.17	55	-	-	--	--	<b>PA0752496</b>	183362	<b>PD0752496</b>	183584	255	116	200	34	5.5

‡ Approximate

† Not recommended for use in swing sets.

### Reels - Inco, Double Loop Chain (Order Unit is "Each Reel")

Trade Size	Nom. Dimensions		Blu-Krome		White		Polycoated Yellow		Green		Red		Working Load		Reel			
	Mat. Dia.	Inside Length	Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418	Limit lb	kg	Feet/ Reel	Lb/ Reel	Width in.	Links/ ft.
†4	.07/2	1.00/25	<b>0720427</b>	064593	--	--	--	--	--	--	--	--	70	32	500	24.0	10.75	12.0
†3	.08/2	1.10/28	<b>0723227</b>	064791	--	--	--	--	--	--	--	--	90	41	200	14.0	5.5	10.9
†3	.08/2	1.10/28	--	--	<b>PA0722227</b>	183850	--	--	--	--	<b>PG0722227</b>	183423	90	41	150	10.5	5.5	10.9
†2	.09/2	1.33/34	<b>0750227</b>	066702	--	--	--	--	--	--	--	--	115	52	250	20.0	10.75	9.0
†1	.11/3	1.54/39	<b>0720127</b>	064579	--	--	--	--	--	--	--	--	155	70	250	25.0	10.75	7.8
†1	.11/3	1.54/39	<b>0722627</b>	183461	--	--	--	--	--	--	--	--	155	70	125	13.8	10.75	7.8
1/0	.12/3	1.78/45	<b>AW0751024</b>	145612	--	--	--	--	--	--	--	--	200	91	100	13.0	5.5	6.7
2/0	.14/3	2.17/55	--	--	<b>PA0722027</b>	183355	<b>PD0722027</b>	183386	<b>PE0722027</b>	183416	--	--	255	116	125	26.8	10.75	5.5
2/0	.14/3	2.17/55	<b>0722027</b>	183263	--	--	--	--	--	--	--	--	255	116	155	27.9	10.75	5.5
2/0	.14/3	2.17/55	<b>0722087</b>	183836	--	--	--	--	--	--	--	--	255	116	60	10.9	10.75	5.5
2/0	.14/3	2.17/55	--	--	--	--	<b>PD0722087</b>	183577	--	--	--	--	255	116	50	10.9	10.75	5.5
3/0	.15/4	2.17/55	<b>0726427</b>	184444	--	--	--	--	--	--	--	--	305	138	150	34.2	10.75	5.5
4/0	.16/4	2.19/56	<b>0726527</b>	184451	--	--	--	--	--	--	--	--	365	166	125	34.6	10.75	5.5

† Not recommended for use in swing sets.

Trade Size	Nom. Dimensions		Blu-Krome		White		Yellow		Green Sleeve		Red		Working Load		Reel			
	Mat. Dia.	Inside Length	Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418	Limit lb	kg	Feet/ Reel	Lb/ Reel	Width in.	Links/ ft.
2/0	.14/3	2.17/55	--	--	--	--	--	--	<b>PS0722027</b>	190827	--	--	255	116	100	21.0	10.75	5.5

#### ⚠ ADVERTENCIA

Para prevenir la posibilidad de una lesión personal seria:

- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** para cargar hacia arriba o para izar.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.

#### ⚠ WARNING

To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** for overhead lifting or hoisting.
- **DO NOT USE** if the chain or components are visibly distorted or worn.

## Special Inco Well Chain

- Uses: General utility; farm and animal; well pipes
- Standard Material: Low carbon steel, galvanized wire
- Packaging: Order unit is "carton"
- **Do not use for overhead lifting**

Trade Size	Nominal Dimensions (in. and mm)						Galvanized Wire		Working Load Limit		Carton/ Feet	Carton/ Lb	Links/ ft.
	Mat. Dia.		Inside Dimensions Length		Width		Cat. No.	UPC No. 020418	lb	kg			
	in.	mm	in.	mm	in.	mm							
2/0	.14	3	2.50	63	-	-	0762024	067174	255	116	250	41	5.5

## Single and Double Jack Chain



Carton



Reel

Single



Double



Individual chain links shown actual size in reference section page 47.

- Uses: Fixture and novelty suspension, general utility use not requiring high strength
- Standard Material: Low carbon steel or brass
- Standard Finish: Blu-Krome (B.K.), polycoated and Brass Glo
- Packaging: 100 foot cartons (order unit is "feet") and on reels to fit Campbell merchandisers (order unit is "each")
- **Do not use for overhead lifting**

## Cartons - Single Jack Chain (Order Unit is "Feet")

Trade Size	Nominal Dimensions (in and mm)				Steel, Blu-Krome		Brass, Bright		Working Load Limit				Feet/ Carton	Lb/ 100 ft.	Links/ ft.
	Mat. Dia.		Inside Length		Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418	Steel		Brass				
	in.	mm	in.	mm					lb	kg	lb	kg			
16	.06	2	.50	13	0801624	067402	0811614	067587	10	5	8	4	100	3	24
14	.08	2	.63	16	0801424	067365	--	--	16	7	11	5	100	4.15	19
12	.11	3	.75	19	0801224	067327	--	--	29	13	20	9	100	8.5	16
10	.14	3	.93	24	0801024	067280	--	--	43	20	34	15	100	14	13
8	.16	4	1.09	28	0800824	067235	--	--	60	27	43	20	100	21	11

### ⚠ ADVERTENCIA

Para prevenir la posibilidad de una lesión personal sería:

- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** para cargar hacia arriba o para izar.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.

### ⚠ WARNING

To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** for overhead lifting or hoisting.
- **DO NOT USE** if the chain or components are visibly distorted or worn.

### Reels - Single Jack Chain (Order Unit is "Each Reel")

Nominal Dimensions (in and mm)																				
Trade Size	Mat. Dia.		Inside Length		Steel Blu-Krome		Solid Brass, Bright		Steel, Brass Glo		Black Polycoated		Working Load Limit		Feet Per Reel	Lb Per Reel	Reel Width in.	Link Per ft.		
	in.	mm	in.	mm	Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418	lb	kg	lb	kg	Reel	Reel		
18	.05	1	.39	10	AW0801827	145711	--	-	--	-	--	-	5	2	4	2	200	5	3.5	31
16	.06	2	.50	13	0724027	064920	--	-	--	-	--	-	10	5	8	4	250	8	3.5	24
16	.06	2	.50	13	--	-	AW0811617	145759	--	-	--	-	10	5	8	4	200	9	3.5	24
14	.08	2	.63	16	--	-	--	--	--	-	PB0722827	183379	16	7	11	5	190	10	3.5	19
14	.08	2	.63	16	AW0801427	145698	AW0811417	145742	--	-	--	-	16	7	11	5	200	12	3.5	19
12	.11	3	.75	19	0801227	067334	--	-	--	-	--	-	29	13	20	9	500	45	10.75	16
12	.11	3	.75	19	0721727	064746	--	-	0724022	064913	--	-	29	13	20	9	100	9	3.5	16
12	.11	3	.75	19	AW0801227	145681	AW0811217	145735	--	-	--	-	29	13	20	9	200	17	5.5	16
10	.14	3	.93	24	--	-	--	-	0724020	064906	--	-	43	20	34	15	100	15	5.5	13
10	.14	3	.93	24	AW0801027	145674	AW0811017	145728	--	-	--	-	43	20	34	15	100	15	5.5	13

### Reels - Double Jack Chain (Order Unit is "Each Reel")

Nominal Dimensions (in. and mm)																
Trade Size	Mat. Dia.	Inside Dimensions				Blu-Krome		Brass Glo		Working Load Limit		Feet/ Reel	Lb/ Reel	Reel Width in.	Links/ Reel	
		Length	Width	Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418	lb	kg							
16	.06	2	.50	13	-	-	0721627	064722	0721667	064739	11	5	200	9	3.5	24.0

### Sash Chain



Individual chain links shown actual size in reference section page 47.



Carton



Reel

- Uses: Counter-balance chain for double hung window sashes, arc lamp chain, animal chain
- Standard Material: Low carbon steel or bronze, and also available in stainless steel
- Standard Finish: Blu-Krome (B.K.) and Copper Plated
- Packaging: 100 ft. carton (order unit is "feet") and on reels to fit Campbell merchandisers (order unit is "each")
- **Do not use for overhead lifting**

#### ⚠ ADVERTENCIA

Para prevenir la posibilidad de una lesión personal seria:

- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** para cargar hacia arriba o para izar.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.

#### ⚠ WARNING

To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** for overhead lifting or hoisting.
- **DO NOT USE** if the chain or components are visibly distorted or worn.



## Cartons - Sash Chain (Order Unit is "Feet")

Nominal Dimensions (in. and mm)								Working Load Limit									
Trade Size	Stock		Inside		Blu-Krome		Copper Plated		Solid Bronze		Steel		Bronze		Feet/ Carton	Lb/ 100'	Links/ ft.
	Thickness in.	mm	Length in.	mm	Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418	lb	kg	lb	kg			
8	.04	1	.55	14	<b>0890824</b>	067952	<b>0890844</b>	067976	--	--	75	34	68	31	100	4	22
†8	.04	1	.55	14	--	--	<b>0880844</b>	067921	--	--	75	34	-	-	100	4	22
25	.04	1	.55	14	<b>0892524</b>	068034	<b>0892544</b>	068058	--	--	94	43	80	36	100	5	22
30	.03	1	.59	15	<b>0893024</b>	068119	--	--	<b>0893074</b>	068157	81	37	75	34	100	5	20
35	.04	1	.59	15	<b>0893524</b>	068201	<b>0893544</b>	068225	<b>0893574</b>	068249	106	48	100	45	100	6	20
40	.04	1	.59	15	<b>0894024</b>	068287	<b>0894044</b>	068300	<b>0894074</b>	068324	131	59	125	57	100	7	20
45	.05	1	.56	14	<b>0894524</b>	068362	<b>0894544</b>	068409	<b>0894574</b>	068423	175	79	163	74	100	9	21
50	.06	2	.65	17	<b>0895024</b>	068454	<b>0895044</b>	068478	<b>0895074</b>	068492	225	102	210	95	100	11	21

† This item includes fixtures for 7 double hung sashes. Order unit is box. Weight per box is 5 pounds. Sizes 30, 35 and 40 are also known as sizes 2, 3 and 4 navy chain.

## Cartons - Sash Chain (Order Unit is "Feet")

Nominal Dimensions (in. and mm)					Working Load Limit						
Trade Size	Stock		Inside		Stainless Steel		Stainless Steel		Feet/ Carton	Lb/ 100'	Links/ ft.
	Thickness in.	mm	Length in.	mm	Cat. No.	UPC No. 020418	lb	kg			
8	.04	1	.55	14	<b>0898014</b>	068560	75	34	100	4	22
35	.04	1	.59	15	<b>0895314</b>	068515	175	79	100	6	20

Size 35 is also known as size 3 navy chain.

## Reels - Sash Chain (Order Unit is "Each Reel")

Nominal Dimensions (in. and mm)								Working Load Limit										
Trade Size	Stock		Inside		Blu-Krome		Copper Plated		Solid Bronze		Steel		Bronze		Feet/ Reel	Lb/ Reel	Reel Width in.	Links/ ft.
	Thickness in.	mm	Length in.	mm	Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418	lb	kg	lb	kg				
8	.04	1	.55	14	<b>0890827</b>	067969	<b>0890847</b>	067983	--	--	75	34	68	31	500	30	5.5	22
35	.04	1	.59	15	<b>0893527</b>	068218	<b>0893547</b>	068232	--	--	106	48	100	45	500	30	10.75	20
35	.04	1	.59	15	<b>0723727</b>	064876	--	--	--	--	106	48	100	45	100	7	3.5	20

**⚠ ADVERTENCIA**

Para prevenir la posibilidad de una lesión personal sería:

- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** para cargar hacia arriba o para izar.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.

**⚠ WARNING**

To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** for overhead lifting or hoisting.
- **DO NOT USE** if the chain or components are visibly distorted or worn.

### Decorator Chain



No.4



No.10



Reel

- For hanging plants and lamps, drapery tie-backs
- Six finishes: brass glo, black, antique brass, white, antique copper, antique silver
- Available on reels, order unit is "each"

Trade Size	Mat. Dia.		Inside Dimensions				Finish	Cat. No.	UPC No. 020418	Working Load Limit		Feet/ Reel	Lb/ Reel	Reel Width in.
	in.	mm	in.	mm	in.	mm				lb	kg			
4	.120	3	.58	14.7	.21	5.3	Blu-Krome	0720428	178771	70	32	90	10	3.5
4	.120	3	.58	14.7	.21	5.3	Antique Brass-Polycoated	0720457	064609	70	32	90	10	3.5
4	.120	3	.58	14.7	.21	5.3	Brass Glo	0720467	064616	70	32	90	10	3.5
4	.120	3	.58	14.7	.21	5.3	Black Polycoated	0720477	064623	70	32	90	10	3.5
10	.135	3.4	1.21	30.7	.52	13.2	Brass Glo	0722000	190834	35	16	60	10	3.5
10	.135	3.4	1.21	30.7	.52	13.2	Black Polycoated	0722002	183218	35	16	40	6.8	3.5
10	.135	3.4	1.21	30.7	.52	13.2	Antique Brass	0722003	183225	35	16	40	6.8	3.5
10	.135	3.4	1.21	30.7	.52	13.2	White Polycoated	0722004	183232	35	16	40	6.8	3.5
10	.135	3.4	1.21	30.7	.52	13.2	Antique Copper	0722006	183249	35	16	40	6.8	3.5
10	.135	3.4	1.21	30.7	.52	13.2	Antique Silver	0722007	183256	35	16	40	6.8	3.5

### Hobby/Craft Decorator Chain - Standard Reel Sizes



No.100 Brass Plated



No.100 Black



Dimpled - Brass Plated



Reel

See chart at top of next page. →

#### ⚠ ADVERTENCIA

Para prevenir la posibilidad de una lesión personal seria:

- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** para cargar hacia arriba o para izar.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.

#### ⚠ WARNING

To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** for overhead lifting or hoisting.
- **DO NOT USE** if the chain or components are visibly distorted or worn.

## Hobby/Craft Decorator Chain - Standard Reel Sizes

Reels Trade Size	Stock Diameter		Inside Length		Inside Width		Cat. No.	UPC No. 020418	Finish	Feet Per Reel		Reel Width, in.	Pounds Per Reel		Working Load Limit	
	in	mm	in	mm	in	mm				ft.	m		lb	kg	lb	kg
100	.087	2.2	.63	16	.24	6	0711017	188251	Brass Plated	197	60.5	4 1/2	6.10	29	13	6
100	.087	2.2	.63	16	.24	6	0711077	188268	Black	197	60.5	4 1/2	6.10	29	13	6
40	.079	2	.67	17	.20	5	0714017	188473	Dimpled-Brass Plated	197	60.5	4 1/2	6.20	35	16	7
40	.079	2	.67	17	.20	5	0714077	188480	Dimpled-Black	197	60.5	4 1/2	6.20	35	16	7
40	.079	2	.67	17	.20	5	0714087	188497	Dimpled-White	197	60.5	4 1/2	6.20	35	16	7
40	.079	2	.67	17	.20	5	0714097	188503	Dimpled-Antique Brass Plated	197	60.5	4 1/2	6.20	35	16	7
50	.118	3	1.14	29	.33	8.5	0715017	188510	Dimpled-Brass Plated	66	20.1	4 1/2	5.40	44	20	9
50	.118	3	1.14	29	.33	8.5	0715077	188527	Dimpled-Black	66	20.1	4 1/2	5.40	44	20	9
50	.118	3	1.14	29	.33	8.5	0715087	188534	Dimpled-White	66	20.1	4 1/2	5.40	44	20	9
50	.118	3	1.14	29	.33	8.5	0715097	188541	Dimpled-Antique Brass Plated	66	20.1	4 1/2	5.40	44	20	9

## Hobby/Craft Cathedral Chain - Standard Size Reels



No.31 Brass Plated



No.31 Black

Reels Trade Size	Stock Diameter		Inside Length		Inside Width		Cat. No.	UPC No. 020418	Finish	Feet Per Reel		Reel Width, in.	Pounds Per Reel		Working Load Limit	
	in	mm	in	mm	in	mm				ft.	m		lb	kg	lb	kg
31	.087	2.2	.95	24	.40	10	0713117	188374	Brass Plated	98	29.9	4 1/2	5.95	2.7	35	16
31	.087	2.2	.95	24	.40	10	0713177	188381	Black	98	29.9	4 1/2	5.95	2.7	35	16
31	.087	2.2	.95	24	.40	10	0713187	188398	White	98	29.9	4 1/2	5.95	2.7	35	16
32	.105	2.7	1.57	40	.56	14	0713217	188411	Brass Plated	66	20.1	4 1/2	5.95	2.7	44	20
32	.105	2.7	1.57	40	.56	14	0713277	188428	Black	66	20.1	4 1/2	5.95	2.7	44	20
32	.105	2.7	1.57	40	.56	14	0713287	188435	White	66	20.1	4 1/2	5.25	2.4	44	20
32	.105	2.7	1.57	40	.56	14	0713297	188442	Antique Brass Plated	66	20.1	4 1/2	5.25	2.4	44	20

### ⚠ ADVERTENCIA

Para prevenir la posibilidad de una lesión personal seria:

- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** para cargar hacia arriba o para izar.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.

### ⚠ WARNING

To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** for overhead lifting or hoisting.
- **DO NOT USE** if the chain or components are visibly distorted or worn.

### Hobby/Craft Twist Chain - Mini Reels



No.90 Brass Plated

Reels Trade Size	Stock Diameter		Inside Length		Inside Width		Cat. No.	UPC No. 020418	Finish	Feet Per Reel		Reel Width, in.	Pounds Per Reel		Working Load Limit	
	in	mm	in	mm	in	mm				ft.	m		lb	kg	lb	kg
70	.039	1	.18	4.5	.06	1.5	0717017	188558	Brass Plated	82	25	3 1/4	2.10	1	15	7
70	.039	1	.18	4.5	.06	1.5	0717027	188565	Nickel Plated	82	25	3 1/4	2.10	1	15	7
90	.047	1.2	.20	5	.08	2	0719017	188572	Brass Plated	82	25	3 1/4	2.90	1.3	20	9
90	.047	1.2	.20	5	.08	2	0719027	188589	Nickel Plated	82	25	3 1/4	2.90	1.3	20	9
200	.079	2	.40	10	.16	4	0712017	188282	Brass Plated	49	15	3 1/4	2.30	1.04	29	13
200	.079	2	.40	10	.16	4	0712027	188299	Nickel Plated	49	15	3 1/4	2.30	1.04	29	13
200	.079	2	.40	10	.16	4	0712077	188305	Black	49	15	3 1/4	2.30	1.04	29	13
250	.099	2.5	.43	11	.16	4	0712517	188312	Brass Plated	33	10	3 1/4	2.75	1.24	35	16
250	.099	2.5	.43	11	.16	4	0712527	188329	Nickel Plated	33	10	3 1/4	2.75	1.24	35	16
250	.099	2.5	.43	11	.16	4	0712577	188336	Black	33	10	3 1/4	2.75	1.24	35	16

### Hobby/Craft Clock Chain - Mini Reels



No.5 Brass Plated

Reels Trade Size	Stock Diameter		Inside Length		Inside Width		Cat. No.	UPC No. 020418	Finish	Feet Per Reel		Reel Width, in.	Pounds Per Reel		Working Load Limit	
	in	mm	in	mm	in	mm				ft.	m		lb	kg	lb	kg
3	.043	1.1	.31	8	.11	3	0710317	188183	Brass Plated	164	50	3 1/4	1.50	.68	7	3
3	.043	1.1	.31	8	.11	3	0710327	188190	Nickel Plated	164	50	3 1/4	1.50	.68	7	3
5	.051	1.3	.31	8	.11	3	0710517	188206	Brass Plated	82	25	3 1/4	1.10	.5	13	6
5	.051	1.3	.31	8	.11	3	0710527	188213	Nickel Plated	82	25	3 1/4	1.10	.5	13	6
7	.063	1.6	.31	8	.11	3	0710717	188220	Brass Plated	82	25	3 1/4	1.30	.6	18	8
7	.063	1.6	.31	8	.11	3	0710727	188237	Nickel Plated	82	25	3 1/4	1.30	.6	18	8

### Sash Chain



No.3 Chrome Plated

Reels Trade Size	Stock Diameter		Outside Length		Outside Width		Cat. No.	UPC No. 020418	Finish	Feet Per Reel		Reel Width, in.	Pounds Per Reel		Working Load Limit	
	in	mm	in	mm	in	mm				ft.	m		lb	kg	lb	kg
2	.016	.4	.50	12.5	.20	5	0710217	188169	Brass Plated	164	50	3 1/4	1.10	.5	29	13
2	.016	.4	.50	12.5	.20	5	0710227	188176	Chrome Plated	164	50	3 1/4	1.10	.5	29	13
3	.020	.5	.81	20.5	.27	7	0713027	188367	Chrome Plated	82	25	3 1/4	1.60	.7	35	16

#### ⚠ ADVERTENCIA

Para prevenir la posibilidad de una lesión personal seria:

- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** para cargar hacia arriba o para izar.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.

#### ⚠ WARNING

To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** for overhead lifting or hoisting.
- **DO NOT USE** if the chain or components are visibly distorted or worn.



No.36 Chrome Plated

Reels Trade Size	Stock Diameter		Cat. No.	UPC No. 020418	Finish	Shelf Pack	Feet Per Reel		Reel Width in.	Pounds Per Reel		Working Load Limit	
	in	mm					ft.	m		lb	kg	lb	kg
26	.099	2.5	0712617	188350	Chrome Plated	--	328	100	3 1/4	1.90	.9	9	4
36	.142	3.6	0713627	188459	Chrome Plated	--	164	50	3 1/4	2.60	1.2	11	5
36	.142	3.6	0713617	147111	Brass	--	164	50	3 1/4	2.60	1.2	11	5
26	--	--	B0712601	158834	#26 Ball Chain Connector, Chrome Plated	10 Bags+	--	--	--	--	--	--	--
36	--	--	B0713601	156755	#36 Ball Chain Connector, Chrome Plated	10 Bags+	--	--	--	--	--	--	--
36	--	--	B0713602	157943	#36 Ball Chain Connector, Brass	10 Bags+	--	--	--	--	--	--	--

+ 6/Bag, 10 Bags/Box

## Oval Link Chain



Reels Trade Size	Stock Diameter		Inside Length		Inside Width		Cat. No.	UPC No. 020418	Finish	Feet Per Reel		Reel Width, in.		Pounds Per Reel		Working Load Limit	
	in	mm	in	mm	in	mm				ft.	m	lb	kg	lb	kg		
19	.043	1.1	.20	5	.11	3	0711917	188275	Brass Plated	82	25	3 1/4	1.70	.8	7	3	

## Plastic Chain



Square Pails



Reel



- Used for creating borders for flower beds, gardens, driveways, etc.
- For decorative non-load bearing use only

- Comes in three colors: white, yellow, or black.
- **Do not use for overhead lifting, towing or pulling.**

## Square Pails - Plastic Chain (Order Unit is "Each Pail")

Trade Size	Nominal Dimensions (in. and mm)											Feet/ Pail	Lb/ Pail	
	Mat. Dia.	Inside Dimensions				Yellow		White		Black				
		in.	mm	in.	mm	in.	mm	Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418			Cat. No.
#6	.23	6	1.00	25	.30	8	--	--	0990646	185168	--	--	220	--
#8	.29	7	1.50	38	.40	10	0990836	185182	0990846	185205	0990856	185229	138	--

### ⚠ ADVERTENCIA

Para prevenir la posibilidad de una lesión personal sería:

- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** para cargar hacia arriba o para izar.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.

### ⚠ WARNING

To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** for overhead lifting or hoisting.
- **DO NOT USE** if the chain or components are visibly distorted or worn.

### Reels - Plastic Chain (Order Unit is "Each Reel")

Trade Size	Nominal Dimensions (in. and mm)						Yellow		White		Black		Reel Width in.		
	Mat. Dia.*	Inside Dimensions				Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418				
		Length	Width		Reel							Lb/Reel			
#6	.23	6	1.00	25	.30	8	--	--	<b>0990647</b>	185175	--	--	100	7	10.75
#8	.30	7	1.50	38	.50	12	<b>0990837</b>	185199	<b>0990847</b>	185212	<b>0990857</b>	185236	60	5	10.75

\* Since material is not a perfect circle, this figure represents the smallest surface area.

### Plastic Accessories



"S" Hook



Connecting Link

- To be used with Campbell plastic chain
- #6 "S" hook and #6 connecting Link comes in white only
- #8 "S" hook and #8 connecting links come in yellow, white and black colors
- Available bagged only - two pieces per bag
- **Do not use for overhead lifting, towing or pulling**

Trade Size	To Be Used With Campbell Plastic Chain Size	Yellow		White		Black		Pieces/ Bag	Bags/ Box	Lb/ Box
		Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418			
# 6	#6	--	--	<b>B5953564</b>	172748	--	--	2	20	1
# 8	#8	<b>B5953583</b>	172731	<b>B5953584</b>	172724	<b>B5953585</b>	172717	2	20	1

### Connecting Link - Plastic

Trade Size	To Be Used With Campbell Plastic Chain Size	Yellow		White		Black		Pieces/ Bag	Bags/ Box	Lb/ Box
		Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418	Cat. No.	UPC No. 020418			
# 6	#6	--	--	<b>B5953664</b>	172700	--	--	2	20	1
# 8	#8	<b>B5953683</b>	172694	<b>B5953684</b>	172687	<b>B5953685</b>	172670	2	20	1

#### ⚠ ADVERTENCIA

Para prevenir la posibilidad de una lesión personal seria:

- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** para cargar hacia arriba o para izar.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.

#### ⚠ WARNING

To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** for overhead lifting or hoisting.
- **DO NOT USE** if the chain or components are visibly distorted or worn.

## Cable and Chain - Plastic Clam Shell Packs

- Product packaged in clear, see-through plastic clam shells
- Customer can see product first hand
- Convenient hang up hole
- Serves as reusable storage box



Trade Size in.	Description	Cat. No.	UPC No.	Working Load Limit		Feet/Pack	Packs/Ctn.	Lb/Ctn.
				lb	kg			
3/16	Proof Coil/B-K	5971230	185243	800	360	10	6	24
2/0	Passing Link/B-K	5973000	185250	450	204	10	5	17
.135	Hdy Link/B-K	5973300	185267	255	116	15	5	10
2/0	Str. Link Coil/B-K	5973310	185274	520	236	10	5	15
#3	Inco/White	5977500	185298	90	41	15	5	6
#3	Inco/Blu-Krome	5977502	185304	90	41	15	9	10
#1	Inco/BluKrome	5977510	185311	155	70	15	5	9
2/0	Inco	5977522	185335	255	116	15	6	16
#12	Single Jack/Blu-Krome	5978000	185342	20	9	15	9	12
#16	Single Jack/Blu-Krome	5978020	185366	8	4	15	9	5
#16	Double Jack/Brass Glo	5978200	785373	8	4	15	9	6
#10	Decorator Chain/Brass Glo	5979600	185403	35	16	10	5	7
#10	Decorator Chain/Black	5979610	185410	35	16	10	5	8
#10	Decorator Chain/White	5979630	185434	35	16	10	5	8
#8	PIChn.w/2 #8 C-Links/Yel	5979938	185441	-	-	15	3	5
#6	PIChn.w/2 #6 C-Links/Wht	5979946	185458	-	-	15	5	5
#8	PIChn.w/2 #8 C-Links/Wht	5979948	185465	-	-	15	3	5
3/32	Coated Cable	5977000	185564	184	83	25	6	4.7
3/32	Coated Cable	5977001	185571	184	83	50	6	10.2
1/8	Coated Cable	5977010	185588	340	154	25	6	6
1/8	Coated Cable	5977011	185595	340	154	50	6	11.1
3/16	Coated Cable	5977020	185601	840	381	25	3	11.6
1/8	Uncoated Cable	5977111	185632	340	154	50	6	8.3

**⚠ ADVERTENCIA**

Para prevenir la posibilidad de una lesión personal seria:

- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** para cargar hacia arriba o para izar.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.


**⚠ WARNING**

To prevent the possibility of serious bodily injury:


- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** for overhead lifting or hoisting.
- **DO NOT USE** if the chain or components are visibly distorted or worn.



### Cable and Wire Rope



Cross Section  
Flexible 7 x 7



Cross Section  
Extra Flexible 7 x 19

- Campbell's cable is either 7x7 or extra flexible 7x19 construction as illustrated \*
- \* 7000197 Green vinyl coated cable is 1x7 Iron Wire construction and 7001127 and 7001227 are 6x7 galvanized Iron Sash cord construction, which enables bending and shaping of cable
- High strength cable with a galvanized finish
- Vinyl coated cable is more resistant to abrasion and weathering, and can be cleaned easily
- Campbell's Wire Rope is 6x19 fiber core construction and treated with a rust prohibiting oil

Cat. No.	UPC No. 020418	Size		Type Const.	Feet Per Reel	Size With Coating		Reel Width in.	Lb Per Reel	Working Load Limit		
		in.	mm			in.	mm			lb	kg	
<b>Cable - Uncoated</b>												
7000227	100253	1/16	1	7 x 7	500	-	-	2	5	96	44	
7000327	100260	3/32	2	7 x 7	500	-	-	3	14	184	83	
7000427	100284	1/8	3	7 x 7	500	-	-	3	16	340	154	
7000627	100307	3/16	5	7 x 19	250	-	-	3	18	840	381	
7000827	100321	1/4	6	7 x 19	250	-	-	5 1/2	26	1400	635	
7000927	189463	5/16	8	7 x 19	200	-	-	5 1/2	35	1960	889	
7001127	189470	1/8	3	6 x 7	500	-	-	3	13	100	45	
7001227	189487	3/16	5	6 x 7	250	-	-	3	14	230	103	
<b>Cable - Vinyl Coated</b>												
7000397	100277	3/32	2	7 x 7	250	3/16	4.6	3	7 3/4	184	83	
7000497	100291	1/8	3	7 x 7	250	3/16	4.6	3	10	340	154	
7000697	100314	3/16	5	7 x 19	250	1/4	6.4	5 1/2	20 1/2	840	381	
7000897	100338	1/4	6	7 x 19	200	5/16	7.9	5 1/2	27	1400	635	
7003397	100345	3/32	2	7 x 7	500	3/16	4.6	5 1/2	16	184	83	
7003497	100352	1/8	3	7 x 7	500	3/16	4.6	5 1/2	20	340	154	
<b>Cable - Coated Green</b>												
7000197	189456	1/16	1	1 x 7	250	1/8	3	3	5	28	13	
<b>Wire Rope - Uncoated</b>												
7008027	190902	1/4	6	6 x 19	500	-	-	6	53	1040	472	
7008227	190919	5/16	8	6 x 19	500	-	-	6	82	1700	771	
7008327	190926	3/8	10	6 x 19	250	-	-	6	118	2400	1075	
7008427	190933	1/2	13	6 x 19	250	-	-	6	105	4280	1917	

#### ⚠ ADVERTENCIA

Para prevenir la posibilidad de una lesión personal seria:

- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** para cargar hacia arriba o para izar.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.

#### ⚠ WARNING

To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** for overhead lifting or hoisting.
- **DO NOT USE** if the chain or components are visibly distorted or worn.

**Construction Chain**

- Uses: General-purpose chain primarily used in telecommunications industry for tying, binding and pulling; outside the plant
- Standard Material: BBB chain
- Standard Finish: Self Colored (S.C.)
- Packaging: Order unit is "each"
- **Do not use for overhead lifting**



Cat. No.	UPC No.	Size			Weight Each		Working Load Limit				
		in.	x	ft.	mm	x	m	lb	kg		
0213505	178405	5/16	x	4 1/3	8	x	1.3	14	6	1700	771

**Binder Chains**

- A complete line of tie down chains
- All chains listed may be used in accordance with the latest D.O.T. regulations
- You may choose either System 4 chain with a Bright finish, or yellow chromated zinc electroplated System 7 chain with higher load-to-weight ratios
- All binders have a forged heat treated clevis grab hook on each end
- **Do not use for overhead lifting**



**System 4 - Binder Chains**

						With Clevis Grab Hooks			With Clevis Grab Hooks			Weight Each		Working Load Limit	
in.	x	Size		ft	m	Cat. No.	UPC No.	Std. Pkg.	Cat. No.	UPC No.	Std. Pkg.	lb	kg	lb	kg
		mm	x												
5/16	x	20	8	x	6.1	0226615	059995	25	--	--	--	23	10	3900	1770
5/16	x	25	8	x	7.6	0226625	060007	25	--	--	--	28	13	3900	1770
3/8	x	12	10	x	3.7	0222525	174339	25	--	--	--	22	10	5400	2450
3/8	x	14	10	x	4.3	0222625	174353	25	--	--	--	25	11	5400	2450
3/8	x	16	10	x	4.9	0222725	174377	20	--	--	--	28	13	5400	2450
3/8	x	20	10	x	6.1	0222925	174414	20	--	--	--	34	15	5400	2450
3/8	x	25	10	x	7.6	0223025	174438	20	--	--	--	40	18	5400	2450

**System 4 - Binder Chains, Packed 1 per Bag**

						With Clevis Grab Hooks			With Clevis Grab Hooks			Weight Each		Working Load Limit	
in.	x	Size		ft	m	Cat. No.	UPC No.	Std. Pkg.	Cat. No.	UPC No.	Std. Pkg.	lb	kg	lb	kg
		mm	x												
3/8	x	14	10	x	4.3	T0222615	163081	1/Bag	--	--	--	25	11	5400	2450
3/8	x	16	10	x	4.9	T0222725	163067	1/Bag	--	--	--	28	13	5400	2450

**⚠ ADVERTENCIA**

Para prevenir la posibilidad de una lesión personal sería:

- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** para cargar hacia arriba o para izar.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.

**⚠ WARNING**

To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** for overhead lifting or hoisting.
- **DO NOT USE** if the chain or components are visibly distorted or worn.

### System 7 - Binder Chains

in.	x	Size				With Clevis Grab Hooks			With Clevis Grab Hooks			Weight		Working Load Limit	
		ft	mm	x	m	Cat. No.	UPC No. 020418	Std. Pkg.	Cat. No.	UPC No. 020418	Std. Pkg.	lb	kg	lb	kg
5/16	x	14	8	x	4.3	0513571	174162	25	--	--	--	17	8	4700	2130
5/16	x	16	8	x	4.9	0513572	174179	25	--	--	--	19	9	4700	2130
5/16	x	18	8	x	5.5	0513573	174186	25	--	--	--	21	10	4700	2130
5/16	x	20	8	x	6.1	0513574	174193	25	--	--	--	23	10	4700	2130
5/16	x	25	8	x	7.6	0513575	174209	25	--	--	--	28	13	4700	2130
3/8	x	14	10	x	4.3	0513658	064128	25	--	--	--	25	11	6600	2990
3/8	x	16	10	x	4.9	0513660	064135	25	--	--	--	28	13	6600	2990
3/8	x	20	10	x	6.1	0513665	064159	20	--	--	--	34	15	6600	2990
3/8	x	25	10	x	7.6	0513667	064166	20	--	--	--	41	19	6600	2990
1/2	x	20	13	x	6.1	0513765	178788	10	--	--	--	54	25	11,300	5130

### System 7 - Binder Chains, Packed 1 per Bag

in.	x	Size				With Clevis Grab Hooks			With Clevis Grab Hooks			Weight		Working Load Limit	
		ft	mm	x	m	Cat. No.	UPC No. 020418	Std. Pkg.	Cat. No.	UPC No. 020418	Std. Pkg.	lb	kg	lb	kg
5/16	x	14	8	x	4.3	T0513521	163074	1/Bag	--	--	--	15	7	4700	2130

### Log Chains



- Made from System 3 chain with grab hook one end, slip hook other end
- Self Colored finish
- Packed one 14 ft. length in a bag; 2 bags per box
- Order unit is "each"

Trade Size	mm	in.	Mat. Size	mm	Cat. No.	UPC No. 020418	Pounds Each	Working Load Limit	
								lb	kg
5/16	8	.32		8	1005405	068584	16	1900	860
3/8	10	.39		10	1005505	068591	23	2650	1200

#### ⚠ ADVERTENCIA

Para prevenir la posibilidad de una lesión personal seria:

- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** para cargar hacia arriba o para izar.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.

#### ⚠ WARNING

To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** for overhead lifting or hoisting.
- **DO NOT USE** if the chain or components are visibly distorted or worn.

**Tow Chains**

- Campbell tow chains are available in System 4, or System 7
- All have forged clevis hooks
- Tow chains are subject to shock loading and must be inspected frequently
- They must be taken out of service when damaged
- Select the right chain for the job according to the working load limits
- Order unit is "each"
- **Do not use for overhead lifting**



Cat. No.	UPC No.	Size				Description	Standard Finish	Packaging	Lb Each	Working Load Limit	
		in.	x ft.	mm	x m					lb	kg
System 7 Tow Chains											
<b>0513578</b>	175794	5/16	x 20	8	x 6.1	System 7 chain, clevis hooks	Yellow Chromate	1/Bag	24	4700	2130
High Test Tow Chains											
<b>0231912</b>	187681	5/16	x 12	8	x 3.6	System 4 chain, clevis hooks	High Visibility Orange	1/Bag	15	3900	1769
<b>0231916</b>	188756	5/16	x 16	8	x 4.9	System 4 chain, clevis hooks	High Visibility Orange	1/Bag	19	3900	1769

**Winch Line Chains**

- Made from Alloy chain and used with wire rope when wrapping is required to lift, pull or skid
- Special hook is designed to minimize fraying of wire rope to which it is attached
- Proof tested
- Order unit is "each"



Trade Size		Cat. No.	UPC No. 020418	Alloy		Length Minus Hook in.	Lb Each	Working Load Limit Alloy	
in.	mm			Cat. No.	UPC No. 020418			Length	Lb
3/4	20	--	--	<b>2011295</b>	068706	18	12	23,000	10,500
7/8	22	--	--	<b>2011495</b>	068713	24	24	34,200	15,500
1	26	--	--	<b>2011695</b>	068720	24	27	38,700	17,600

**⚠ ADVERTENCIA**

Para prevenir la posibilidad de una lesión personal sería:

- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** para cargar hacia arriba o para izar.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.

**⚠ WARNING**

To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** for overhead lifting or hoisting.
- **DO NOT USE** if the chain or components are visibly distorted or worn.

## Dog Halter and Lead Chains



- Inco chain with Blu-Krome finish, toggle, ring and swivel snap
- One chain per clam shell pack

Cat. No.	UPC No. 020418	Chain Size	Chain Length		Wt. per 100 Pieces		Shelf Pack Clam Shells Per Box	Working Load Limit	
			ft.	m	lb	kg		lb	kg
3019501	170980	No. 4	6	1.82	37	17	5	70	32
3019507	171000	No. 2/0	6	1.82	110	50	5	120	54

## Dog Runner and Kennel Chains



- Inco chain with Blu-Krome finish and swivel snaps each end
- One chain per clam shell pack

Cat. No.	UPC No. 020418	Chain Size	Chain Length		Wt. per 100 Pieces		Shelf Pack Clam Shells Per Box	Working Load Limit	
			ft.	m	lb	kg		lb	kg
3109505	171031	No. 1	10	3.04	100	45	5	80	36
3129504	171055	No. 2	15	4.57	125	57	5	80	36
3129507	171079	No. 2/0	15	4.57	250	114	6	120	54

### ⚠ ADVERTENCIA

Para prevenir la posibilidad de una lesión personal seria:

- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** para cargar hacia arriba o para izar.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.


### ⚠ WARNING

To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** for overhead lifting or hoisting.
- **DO NOT USE** if the chain or components are visibly distorted or worn.

**Tie-Out Chains**

- Inco chain with ring and swivel snaps on opposite ends, swivel in center
- One chain per clam shell pack

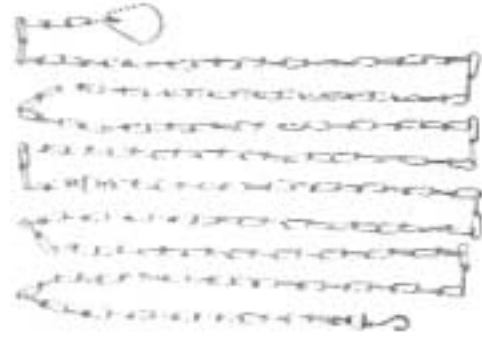

Cat. No.	UPC No.	Chain Size	Chain Length		Wt. per 100 Pieces		Shelf Pack Clam Shells Per Box	Working Load Limit	
			ft.	m	lb	kg		lb	kg
3209507	171109	No. 2/0	20	6.09	325	148	3	120	54

**Porch Swing Chain Assembly with Hooks**

**Porch Swing Chain Set**

- For securing porch swings to porch ceilings
- One pair per clam shell pack

**Porch Swing Hooks**

**Uses:** For swings and porch swings

- Plastic bushing to minimize sliding wear on chain and eyebolt
- Zinc plated
- Packaged 2 hooks per bag



**B0702025**

Cat. No.	UPC No.	Wt. per Shelf Pack		Shelf Pack	Working Load Limit	
		lb	kg		lb	kg
0702024	064562	6.75	3.1	5	500 *	227 *
† B0702025	161643	3.60	1.6	10	500 *	227 *

† Replacement porch swing hook only. 2 pieces per bag; 10 bags per box. Order unit is "Bag."

\* The WLL is 500lb / 227kg per pair

**⚠ ADVERTENCIA**

Para prevenir la posibilidad de una lesión personal sería:

- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** para cargar hacia arriba o para izar.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.

**⚠ WARNING**

To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** for overhead lifting or hoisting.
- **DO NOT USE** if the chain or components are visibly distorted or worn.

### Anchor Leads



Galvanized



Vinyl Coated

- For marine applications
- Oversized oblong end links to accommodate screw pin anchor shackles
- Galvanizing provides excellent resistance to rust and sea water corrosion
- Vinyl coated leads have galvanized links that are individually coated with white vinyl to protect deck finishes
- The lead is fully flexible and easy to handle and store
- Packaged in handsome polybags with descriptive headers; anchor lead chain is also available in pails
- Order unit is "each"

Vinyl Coated		Galvanized		Size				Boat Size	Packaging		Pieces/ Carton		Weight/ Carton		Working Load Limit	
Cat No.	UPC No.	Cat. No.	UPC No.	in.	x ft.	mm x m	Vinyl Coated		Galv.	Vinyl Coated	Galv.	Vinyl Coated	Galv.	lb	kg	
0200495	059421	0204635	059629	1/4	x 4	7 x 1.2	16-25 ft.	Polybag	Polybag	5	5	16.0	16.0	1250	567	
0200595	059445	0205235	059636	5/16	x 5	8 x 1.5	26-40 ft.	Polybag	Polybag	5	5	30.0	30.0	1900	862	

### Chain and Cable Cutters



7508495  
7508595



7508795

7509195



0690TN

Cat. No.	UPC No.	Description	Capacity	Weight Ea.	
	020418			lb	kg
7508495	135477	Hydraulic Chain Cutter	3/8" High Test	33	14
7508595	178320	Hydraulic Chain Cutter #80	3/8" Transport	38	14
7508795	135491	Cam-action Weldless Chain Cutter	All Weldless	5	2
7509195	135507	Ratchet Welded Chain Cutter	3/8" Proof Coil	9	4
7508494	186882	Hydraulic Cutter Guard Kit	--	1	.4
7509196	174506	Repair Kit for 7509195 Cutter	--	3	1.3

Cat. No.	UPC No.	Description	Capacity	Weight Ea.	
	037103			lb	kg
0690TN	911315	Cable Cutter	1/4" Cable	1	.5

#### ⚠ ADVERTENCIA

Para prevenir la posibilidad de una lesión personal seria:

- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** para cargar hacia arriba o para izar.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.

#### ⚠ WARNING


To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** for overhead lifting or hoisting.
- **DO NOT USE** if the chain or components are visibly distorted or worn.




## Straight Link Machine Chain-Product Shown Actual Size


Links shown actual size

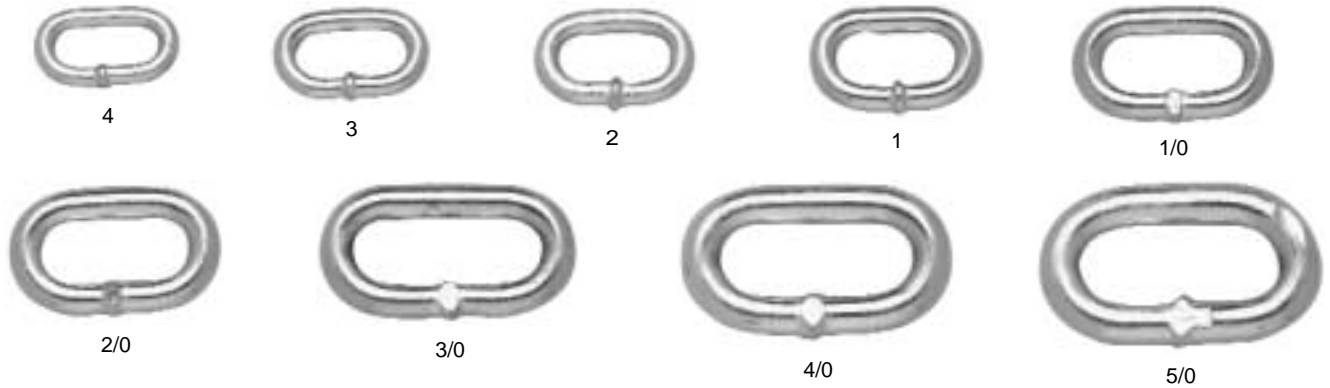

## Twist Link Machine Chain-Product Shown Actual Size

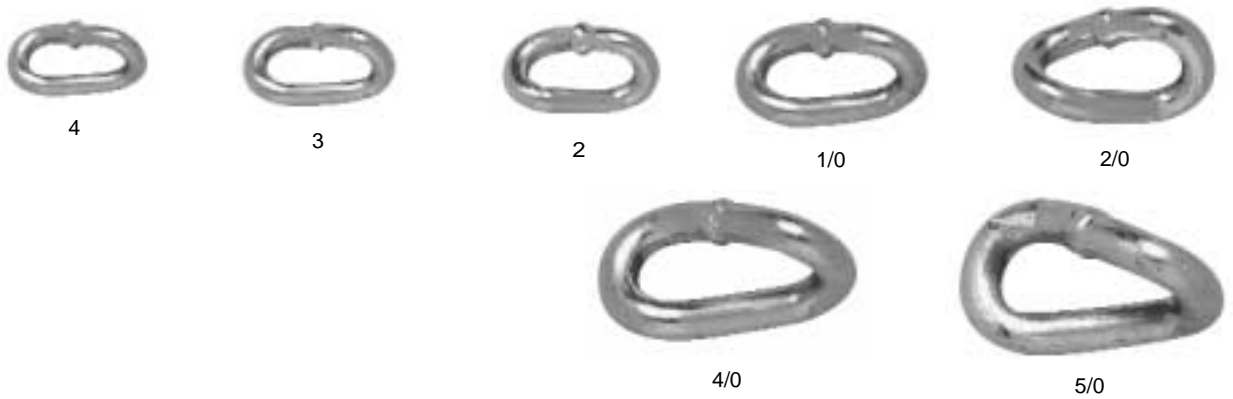

## Straight Link Coil Chain-Product Shown Actual Size

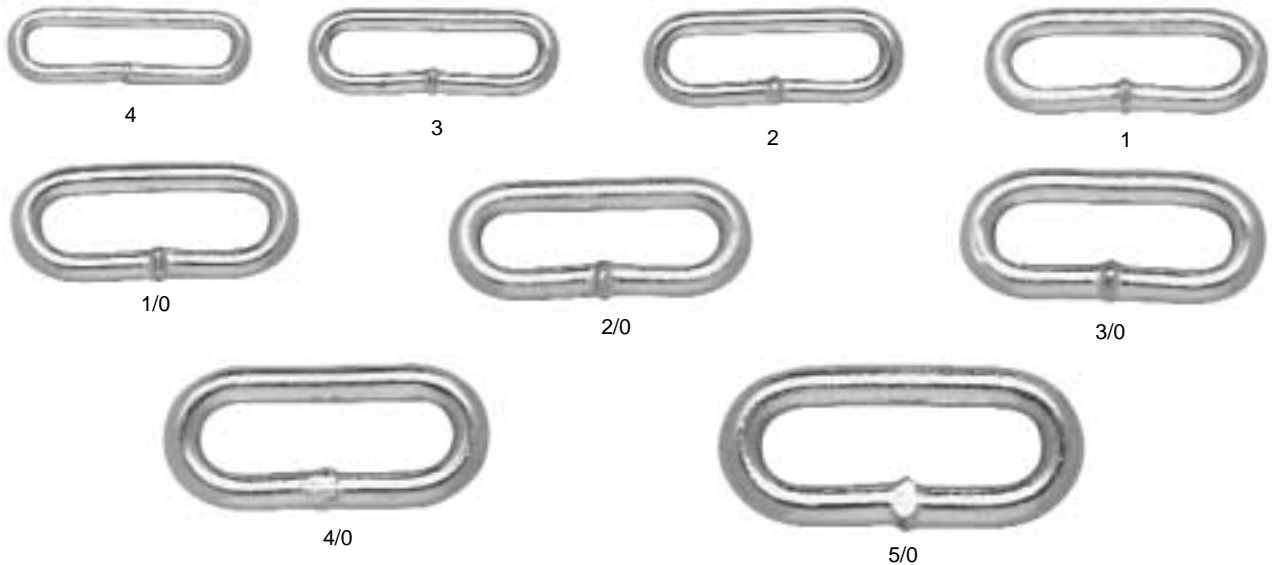

**⚠ ADVERTENCIA**

Para prevenir la posibilidad de una lesión personal sería:

- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** para cargar hacia arriba o para izar.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.

**⚠ WARNING**

To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** for overhead lifting or hoisting.
- **DO NOT USE** if the chain or components are visibly distorted or worn.

## Twist Link Coil Chain-Product Shown Actual Size



3

## Passing Link Chain-Product Shown Actual Size



2/0



4/0

## Lock Link, Single Loop Chain-Product Shown Actual Size



2



1/0



2/0



3/0



4/0



5/0

## Inco, Double Loop Chain-Product Shown Actual Size



4



3



2



1



1/0



2/0



4/0



8/0

### ⚠️ ADVERTENCIA

Para prevenir la posibilidad de una lesión personal seria:


- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** para cargar hacia arriba o para izar.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.

### ⚠️ WARNING


To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** for overhead lifting or hoisting.
- **DO NOT USE** if the chain or components are visibly distorted or worn.

**Jack Chain-Product Shown Actual Size**

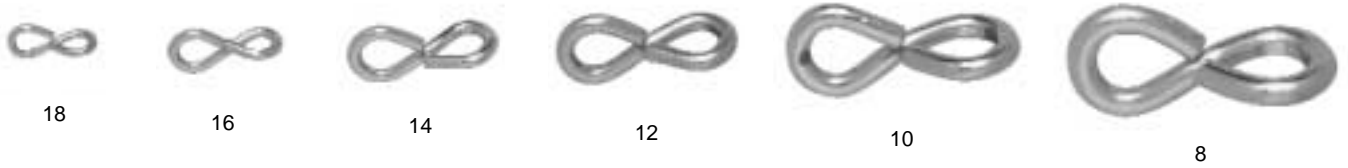

**Sash Chain-Product Shown Actual Size**

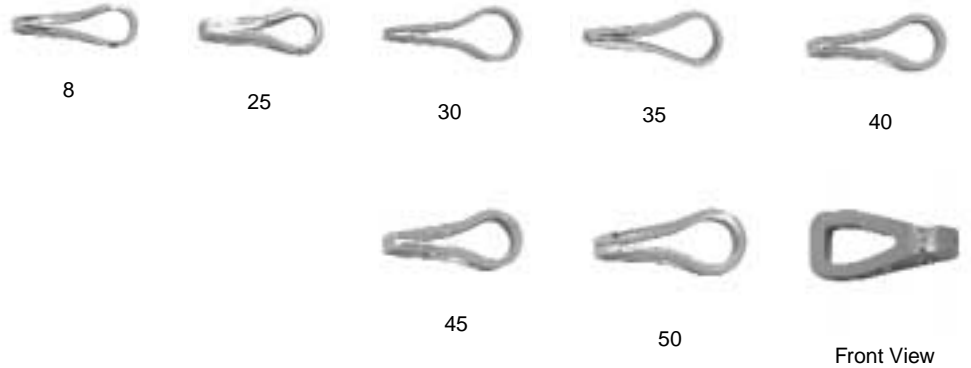

**⚠ ADVERTENCIA**

Para prevenir la posibilidad de una lesión personal seria:

- **NO EXCEDA** los límites de carga de las cadenas o componentes.
- **NO LA UTILICE** para cargar hacia arriba o para izar.
- **NO LA UTILICE** si la cadena o los componentes están visualmente distorsionados o gastados.

**⚠ WARNING**

To prevent the possibility of serious bodily injury:

- **DO NOT EXCEED** the working load limits for chain or components.
- **DO NOT USE** for overhead lifting or hoisting.
- **DO NOT USE** if the chain or components are visibly distorted or worn.